

# Ontology for observations and sampling features, with alignments to existing models

**Editor(s):** Mark Gahegan, Auckland

**Solicited review(s):** Peter Fox, RPI; Anonymous.

Simon J D Cox

*CSIRO Land and Water, PO Box 56, Highett, Vic. 3190, Australia*

*simon.cox@csiro.au*

## Abstract.

We introduce new OWL ontologies for observations and sampling features, based on the O&M conceptual model from OGC and ISO 19156. Previous efforts, (a) through the W3C SSN project, and (b) following ISO rules for conversion from UML, had dependencies on elaborate pre-existing ontologies and frameworks. The new ontologies, known as om-lite and sam-lite, remove such dependencies, and can therefore be used with minimal ontological commitment beyond the O&M conceptual model. Time and space concepts, for which there are multiple existing solutions, are implemented as stub-classes, and patterns for linking to the existing ontologies are described. PROV is used to support certain requirements for the description of specimens. A more general alignment of both observation and sampling feature ontologies with PROV is described, as well as mappings to some other observation models and ontologies.

**Keywords:** observations, sampling, ontology re-use, provenance

## 1. Introduction

Observations and measurements are used to determine values of properties, through application of some procedure at a particular time and place. The result of an observation is strictly an *estimate* of the true value, conditioned by procedure and circumstances, so description of the latter are important in the assessment of the reliability of the estimate.

A conceptual model for observations and measurements (O&M) is described in ISO 19156:2011 [9,31]. This builds on a pattern, developed originally by Fowler and O’Dea [15], which uses the term ‘observation’ to refer to the observation act or event. The O&M model establishes a domain-neutral vocabulary for an observation and its associated properties. The key design goal was to provide a common terminology for both in-situ observations and remote-sensed observations, around which some confusion existed. This is accomplished by separating concerns, with classes for

the feature of interest, the procedure, the observed property, the result, and the act of observation itself. This allows places and times associated with each to be distinct if necessary. O&M also included an important module for sampling features, covering things like stations, transects, cross-sections, images and specimens. The role of a sampling feature is to assist the characterization of the ultimate feature of interest. They are almost ubiquitous in scientific and environmental observations.

A number of other projects have developed ontologies for observations. A review of the state of the art in 2011 was included in a report from the W3C Semantic Sensor Network incubator group [37], mostly using O&M as a framework for comparing existing observation models and ontologies. The incubator group then developed the Semantic Sensor Network ontology (“SSNO”) [5], particularly leveraging the Stimulus-Sensor-Observation pattern (SSO) [34,44], which adds the notion of ‘stimulus’ to the core model

based on O&M. Meanwhile, Cox [11] described an ontology for O&M (“OMU”) based on automatic conversion of the original UML model, using rules developed in ISO 19150-2 [33].

However, these implementations present some barriers to adoption for new applications. In particular

- SSNO includes elements for sensors and observations, but omits sampling features, which are a key element required for many practical applications;
- SSNO is linked to the Dolce-ultra-lite (DUL) implementation of the DOLCE foundational ontology [16], with SSNO concepts directly inheriting from a number of DUL classes and properties. This introduces ontological commitments which conflict with earlier assumptions;
- The UML-OWL conversion rule used for OMU triggers a web of dependencies on additional, sometimes highly detailed, ontologies derived from other ISO 19100-series UML models. This introduces a large amount of baggage, of uneven quality.

In this paper, we introduce a new OWL implementation of O&M which aims to overcome these limitations with two new ontologies. The new ontologies include both the observation and sampling feature models from O&M, and have fewer dependencies on existing ontologies than either OMU or SSNO. We expect that these ontologies can either serve as foundations for more domain-specific treatments, or as bridging ontologies for alignment of existing ontologies developed around specific applications or domains.

The paper is structured as follows: in section 2 we review the O&M UML model from ISO 19156; in section 3 we present the om-lite and sam-lite ontologies and some examples to illustrate their use; in section 4 we explore mappings with existing ontologies for observations, and integration of existing models for space, time and measure; in section 5 we discuss some issues arising from the approach to dependencies, the use of the new ontologies in alignment exercises, the use of PROV for real world entities, and the importance of sampling features. Section 6 provides a summary of the main points.

## 2. O&M conceptual model

### 2.1. Background

Observations and Measurements (O&M) [7–9,31] is one of a group of standards developed through the

Sensor Web Enablement initiative (SWE) from Open Geospatial Consortium (OGC). O&M provides a *user-centric* viewpoint (i.e. user of observation data) that complements the *provider-centric* viewpoint given in SensorML [2]. The main elements of O&M were established in version 1, published in two parts by OGC in 2007 [7,8], and then refined and aligned with the Geographic Information standards from ISO Technical Committee 211, and published as version 2 in 2011 [9,10,31]. For consistency with the ISO 19100 series, the O&M model was specified using the Unified Modeling Language (UML) [23] and re-uses classes from a number of other standards in the series. An XML implementation [10] is used primarily in the context of OGC Sensor Observation Service and Web Feature Service [4,30,45].

O&M has been widely used in environmental monitoring, climate and weather, ocean observations, soils, geology, and some defense and intelligence applications [12], and was adopted as part of the INSPIRE conceptual model [22].

### 2.2. Observations

The core of the Observation model from O&M v2 [9,31] is shown in Figure 1.

An observation is conceived as an event or activity, the result of which is an estimate of the value of a property of the feature of interest, obtained using a specified procedure. The term ‘feature’ is used here in the sense defined in the ‘Reference Model’ used by OGC [42] and by ISO Technical Committee 211 – Geographic Information [27], referring primarily to an entity in the real world. Standard observation properties support a variety of applications. The ‘observed property’ supports important discovery scenarios. Description of the ‘procedure’ supports discovery and the assessment of the quality of the result. A location is typically tied to the ‘feature of interest’ which supports cartographic applications. Separating the feature of interest from the observation and procedure classes allows the same model and terminology to be used for remote-sensing (where the location of the feature of interest and instrument are different), in-situ observation and monitoring (where the procedure is located in the feature of interest), and ex-situ observations (involving specimens taken from a location in the feature of interest for observation in a laboratory).

Values of the key properties are specified as abstract or generic classes, and must be specialized for specific domain applications. For example, the procedure is often an instrument or sensor, but may be an

observer, or an algorithm or processing chain in the case of simulations or forecasts.

Multiple temporal properties are provided, to support the separate description of (i) the time the result was obtained, (ii) the time the result applies to the feature of interest (sometimes contemporary, but may be in the past or future), and (iii) the time when the result is recommended for use (optional, useful in forecasting applications). The ‘mandatory’ resultTime property reflects the event-based nature of observations in this conceptual model.

Specializations of the observation class have been classified by the result-type. For example a Measurement is an observation whose result is a scaled quantity (or ‘Measure’ [28]), and a TruthObservation is an observation whose result is a Boolean value.

Because it was designed to be compatible with the ISO 19100 series of standards issued through ISO/TC 211, the UML formalization of O&M makes extensive use of types and classes from models from these standards, as noted in the caption of Figure 1.

### 2.3. Sampling features

Most observations are actually made on representative samples of the feature of interest, so a model of features used for sampling was developed as separate part of O&M v1 [8] and further refined in O&M v2 [10,28]. A Sampling Feature is a feature constructed

to support the observation process, which may or may not have a persistent physical expression but would either not exist or be of little interest in the absence of an intention to make observations. The core model is shown in Figure 2. The only essential property of a generic Sampling Feature is the ‘sampled feature’ relationship with the feature that it samples.

Some common sampling strategies appear in a number of earth and environmental science disciplines, particularly related to spatial subsets of the feature of interest of an observation. A taxonomy of these was developed based on precedents in climate science [47] with specialized sampling feature types characterized by topological dimension – sampling at a point, sampling along a line or curve, sampling on a surface or section, and sampling in a volume (Figure 3).

Retrieval of a specimen from the feature of interest for ex-situ observation, in a lab or using a procedure that cannot be introduced into the natural environment, is another very common sampling strategy. This is modeled as another specialization, shown in Figure 4.

Finally, it is common for sampling features to occur as part of a complex, with specific relationships between them. For example, specimens retrieved along a borehole, stations along a traverse, or probe-spots on a polished mineral specimen. All of these are sampling features, existing only to support observations. The SamplingFeatureComplex association-class records the semantics of these relationships.

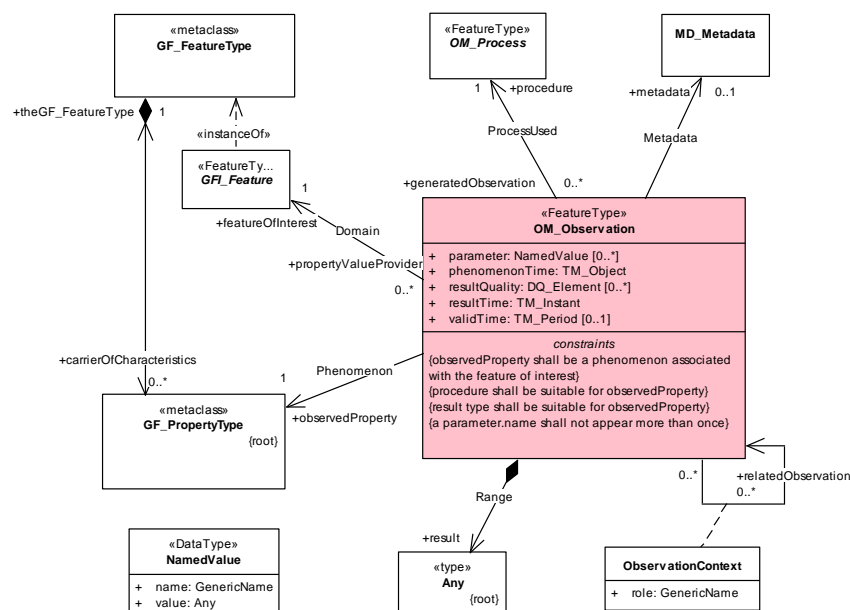


Figure 1 - UML classes and properties in core observation model from O&M in ISO 19156:2011 [31]. This UML is integrated with other models from the ISO 19100 series: classes with the prefix TM\_ are from the Temporal Schema in ISO 19108 [24], with the prefix GF\_ from the

General Feature Model in ISO 19109 [29], MD\_Metadata is from the Metadata Schema in ISO 19115 [25], and DQ\_Element is from the model for Data Quality in ISO 19157 [32].

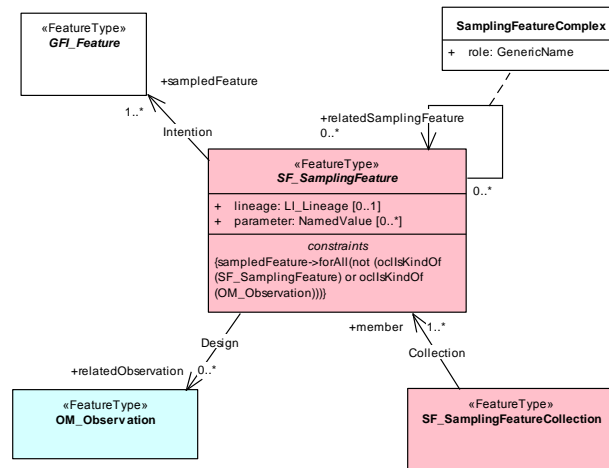


Figure 2 - Classes and properties in core sampling feature model from O&M in ISO 19156:2011 [31]. LI\_Lineage is from the Metadata Schema in ISO 19115 [25].

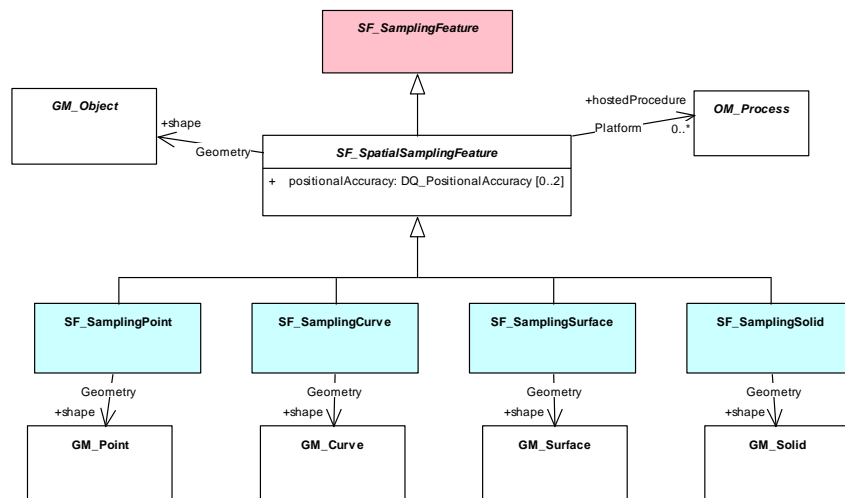


Figure 3 – Spatial sampling feature classes from ISO 19156:2011 [31], characterized by the topological dimension of the shape property described by classes with the prefix GM\_ from the Spatial Schema in ISO 19107 [26]. DQ\_PositionalAccuracy is from the model for Data Quality in ISO 19157 [32].

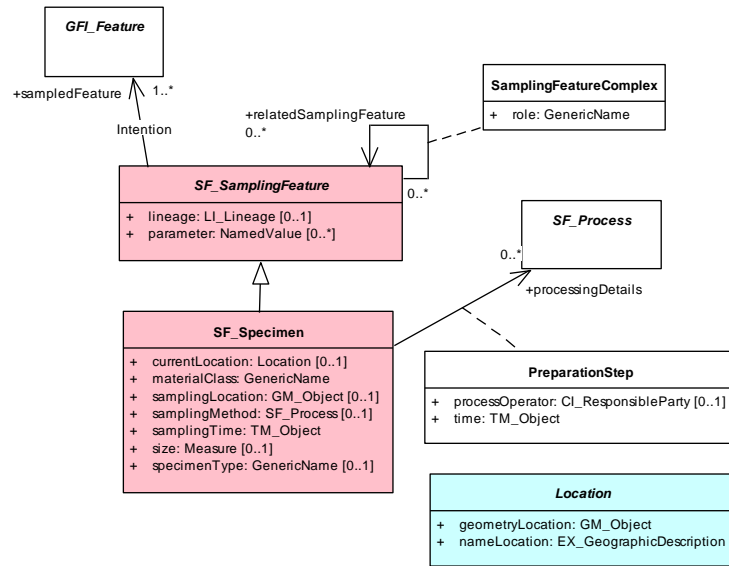


Figure 4 - Specimen model from ISO 19156:2011 [31]. CI\_ResponsibleParty and EX\_GeographicDescription are from the Metadata Model in ISO 19115 [25].

### 3. OWL implementation

#### 3.1. Observations

The new ontology for observations, known as “om-lite” (namespace prefix “oml:”), covers the key classes from O&M, i.e. OM\_Observation and its subclasses, the supporting concept OM\_Process, and the association class ObservationContext (Figure 5). However, where the UML model imported classes from other ISO 19100-series UML models, in om-lite these are implemented as local stubs: oml:TemporalObject in place of TM\_Object; oml:GeometryObject in place of GM\_Object; oml:Measure in place of Measure (for scaled values). Furthermore, classes are not implemented explicitly where they provide a subsidiary capability for which well-known RDF vocabularies may be used (e.g. the functionality of MD\_Metadata is provided by Dublin Core [35], DCAT [38], PROV [36], etc). OWL2 data-types are used when appropriate.

Cardinality restrictions on oml:Observation shown in Figure 5 reflect the expectation that six core properties characterize an observation: featureOfInterest, observedProperty, procedure, phenomenonTime, resultTime and result. (Note that these cardinality con-

straints strictly confine users to the OWL 2 DL language profile, as the less expressive profiles OWL 2 RL, QL and EL do not permit these restrictions [41].)

The key properties from om-lite are represented as shown in Table 1. The oml:resultTime property captures the time when the result became available. This is usually approximately contemporaneous, and usefully tied to the conventional clock and calendar, so the data-type used is xsd:dateTime. On the other hand, the oml:phenomenonTime property provides the time the result applies to the observed-property in the world. Its range is the more general oml:TemporalObject, since observations may estimate the value of a property at a wider range of times than is supported by the dateTime datatype. (Note that OWL-Time [17] is also not sufficient, for reasons explained in [13].) There is no global restriction on the range of oml:featureOfInterest or oml:observedProperty, since a generic model must accommodate observations of any property characterizing a feature or object from any application domain. Likewise, the range of oml:result is not specified for the generic observation class, since property values may have many types and may be characterized in many different ways. Nevertheless, a subset of the specialized O&M observation classes is implemented using local restrictions on the type of oml:result, including oml:Measurement, oml:TruthObservation, etc.

Om-lite includes one significant change from the O&M conceptual model shown in Figure 3. In the

original model, a `SamplingFeature` could substitute for the feature-of-interest, with the ultimate feature-of-interest available via the `sampledFeature` property. An informal constraint that the observed-property was commensurate with the type of the feature-of-interest required some slippery logic to satisfy. In the OWL interpretation we clarify the semantics by separating the (optional) sampling-strategy from the (mandatory) feature-of-interest, and the latter is always the ‘ultimate’ feature-of-interest associated with the observed-property.

### 3.2. *Sampling features*

The ontology for sampling features, known as “sam-lite” (namespace prefix “`samfl:`”) includes all the classes from the O&M Sampling Features model (Figure 6). Table 2 describes the representation in sam-lite of the key properties from O&M sampling features.

A cardinality restriction on `samfl:SamplingFeature` reflects the expectation that at least one `samfl:sampledFeature` property will be present, whose value indicates the intention of the sampling feature. No local or global restriction on the range of `samfl:sampledFeature` is provided, since a generic model must accommodate sampling any feature or object.

Sampling of a feature of interest is frequently achieved using a spatially-defined subset. This is represented by the subclass `samfl:SpatialSamplingFeature`, which has a functional property `samfl:shape`, whose range is `samfl:GeometryObject`. Specific subclasses restrict the type of `samfl:shape`, corresponding to common practice particularly in earth and environmental sciences, following the taxonomy described in

O&M [9,31], which was influenced by Climate Science Modeling Language [47].

`samfl:GeometryObject` and its specializations are stub classes. A user can select any suitable vocabulary that implements these classes, such as GeoSPARQL [43] or W3C Basic Geo [3]. Furthermore, although `samfl:GeometryObject` is equivalent to `owl:GeometryObject` we did not introduce a direct dependency on `owl:GeometryObject` in the core sam-lite vocabulary, as there will be applications that only use sampling features.

Specimens are physical samples retrieved from their natural environment and used (typically) in laboratory observations. This is represented by a subclass `samfl:Specimen`. Required properties are `samfl:sampledFeature` (from `samfl:SamplingFeature`) and `samfl:samplingTime`, whose value indicates when the specimen was retrieved from the sampled feature. Some additional convenience properties are provided (Table 2).

A critical aspect of specimen description is the record of their preparation and lineage. In the O&M model this was implemented using an association class “`PreparationStep`”. However, this approach was not fully satisfactory, particularly as the preparation step is not easily linked to an explicit predecessor specimen. In practice there is a very wide range of specimen preparation and provenance paths, so rather than trying to develop a new generic model we leverage PROV [36], which provides general patterns for description of relationships between activities, parties and related entities. We make `samfl:Specimen` a subclass of `prov:Entity`, thus accommodating the requirements of the O&M `PreparationStep` class as well as enabling relationships with predecessor specimens to be recorded.

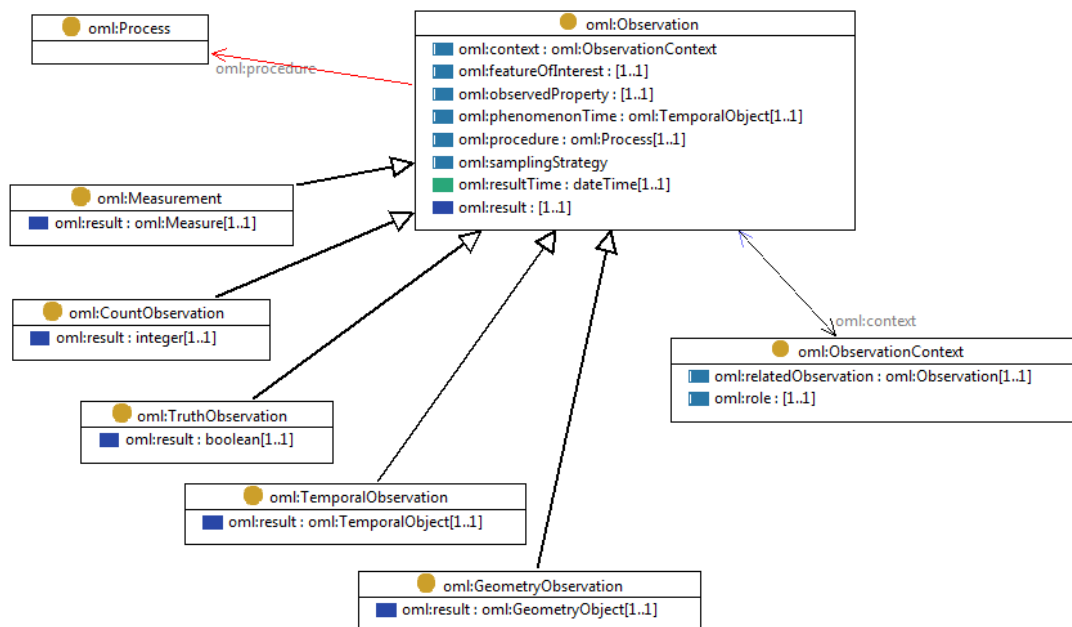


Figure 5 - Basic observation class and specializations from om-lite<sup>1</sup>. Compare with the UML model in Figure 1. Red arrow indicates ‘disjoint’ classes.

Table 1  
Observation properties

Property	Domain	Range
oml:featureOfInterest	oml:Observation	(not defined, but usually a domain feature)
oml:observedProperty (functionalProperty)	oml:Observation	
oml:result (functionalProperty)	oml:Observation	(constrained for observation sub-classes)
oml:procedure	oml:Observation	oml:Process
oml:phenomenonTime	oml:Observation	oml:TemporalObject
oml:resultTime (functionalProperty)	oml:Observation	xsd:dateTime
oml:context	oml:Observation	oml:ObservationContext
oml:relatedObservation		oml:Observation
oml:role	oml:ObservationContext	
oml:samplingStrategy	oml:Observation	(not defined, but often a SamplingFeature)

<sup>1</sup> TopBraid Composer <http://www.topquadrant.com/tools/ide-topbraid-composer-maestro-edition/> was used to prepare the UML-style diagrams showing classes and relationships from om-lite and sam-lite.

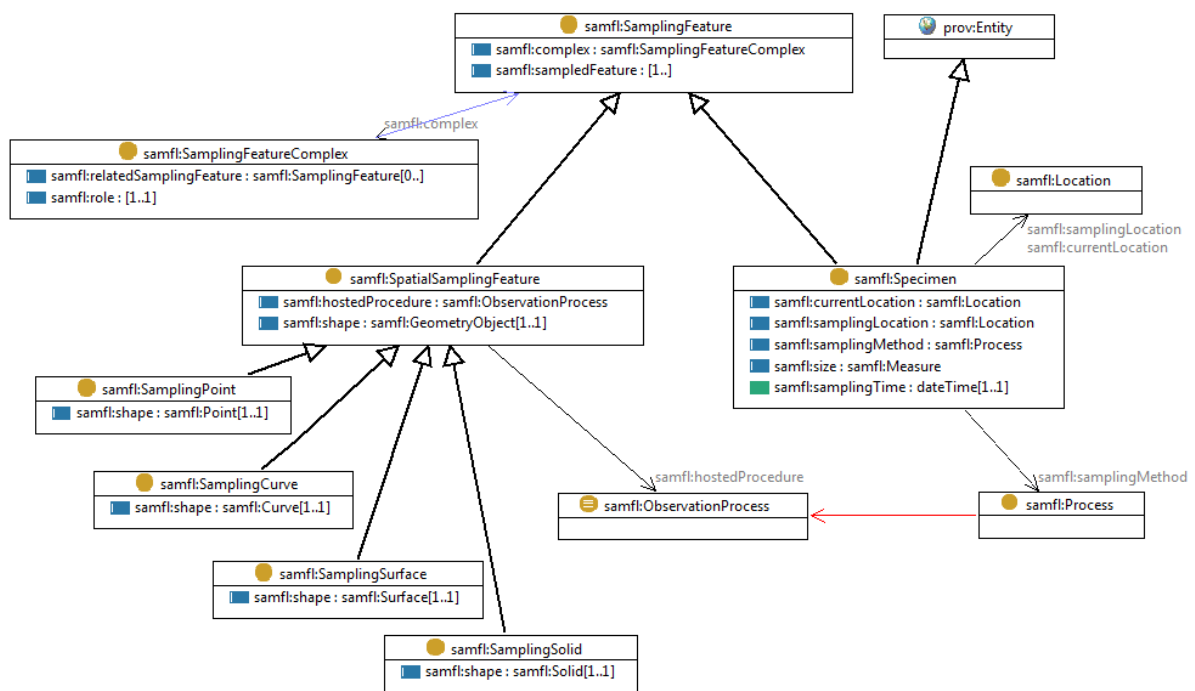


Figure 6 - Sampling features and subclasses in the sam-lite ontology. Compare with the UML model in Figures 2-4.

Table 2  
Sampling feature properties

Property	Domain	Range
samfl:sampledFeature	samfl:SamplingFeature	
samfl:shape (functionalProperty)	samfl:SpatialSamplingFeature	samfl:GeometryObject
samfl:hostedProcedure	samfl:SpatialSamplingFeature	samfl:ObservationProcess
samfl:complex	samfl:SamplingFeature	samfl:SamplingFeatureComplex
samfl:relatedSamplingFeature		samfl:SamplingFeature
samfl:role	samfl:SamplingFeatureComplex	
samfl:samplingTime (functionalProperty)	samfl:Specimen	xsd:dateTime
samfl:samplingMethod	samfl:Specimen	samfl:Process (disjointWith samfl:ObservationProcess)
samfl:samplingLocation	samfl:Specimen	samfl:Location
samfl:currentLocation	samfl:Specimen	samfl:Location
samfl:size	samfl:Specimen	samfl:Measure

### 3.3. Examples

We present a number of dataset examples serialized in Turtle [1]. For these examples the following additional axioms were introduced to allow concrete representations of time and space from existing W3C vocabularies [3,17] to be used as the value of properties whose range is one of the stub classes:

```
<http://www.w3.org/2003/01/geo/wgs84_pos#Point>
  rdfs:subClassOf oml:GeometryObject ;
  rdfs:subClassOf samfl:Point ;
.
<http://www.w3.org/2006/time#TemporalEntity>
  rdfs:subClassOf oml:TemporalObject ;
.
```

#### 3.3.1. Observations

Listing 1 shows a measurement of the weight of a piece of fruit. This corresponds to the first example in section 5.1 of OMU [11]<sup>2</sup>. The key difference is that the namespaces from ISO 19103 [28] and ISO 19108 [24] are not required.

Listing 2 shows a remote sensing observation, in which the result is provided as a link to an image dataset. This corresponds to C.2.3 from the XML (GML) implementation of O&M [10]. While the use of links to resources available elsewhere is available in GML through xlink (to the result, in this case) it is a native capability supported by all RDF processors.

**Listing 1** – A simple measurement example

```
my:obsTest1 a oml:Measurement ;
  rdfs:comment "Observation test instance: fruit mass"^^xsd:string ;
  rdfs:label "Observation test 1"^^xsd:string ;
  oml:featureOfInterest <http://wfs.example.org?request=getFeature&featureid=fruit37f> ;
  oml:observedProperty <http://sweet.jpl.nasa.gov/2.0/phys.owl#Mass> ;
  oml:phenomenonTime [ a w3time:Instant ;
    w3time:inXSDDateTime "2005-01-11T16:22:25.00"^^xsd:dateTime ] ;
  oml:procedure my:Scales1 ;
  oml:result [ a oml:SimpleMeasure ;
    rdf:value "0.28"^^oml:Number ;
    oml:uom <http://www.opengis.net/def/uom/UCUM/0/kg> ] ;
  oml:resultTime "2005-01-11T16:22:25.00"^^xsd:dateTime .
```

#### 3.3.2. Sampling features and specimens

Listing 3 shows the description of a river sampling station including links to two observations made there. This corresponds to C.3.1 from the XML (GML) implementation of O&M [10]. The station is a member of a collection of sampling features, captured using the samfl:complex property. We have also shown how this may be expressed using prov:wasMemberOf from the PROV ontology [36].

Listing 4 shows a description of a specimen of rock, corresponding to the example in section 5.2 of [11]. The description includes links to the parent specimen from which it was generated. The property prov:wasGeneratedBy links to the activity that generated the current specimen, which in turn links to the previous specimen, to the process operator, and to the processing method. This example illustrates how the standard PROV ontology supports specimen preparation descriptions directly.

An alternative formulation of the relationship to a parent specimen is shown in Listing 5. Here the my:split property is a sub-property of samfl:related-SamplingFeature. Further specialization of the PROV properties could support many more elaborate scenarios.

---

<sup>2</sup> URIs in the ‘example.org’ domain or subdomains are illustrative only, and are not dereferenceable. Abbreviated URIs with the ‘my:’ prefix are local examples only.

**Listing 2** – An observation whose result is provided out-of-band

```
my:OPTest1 a oml:Observation ;
  rdfs:comment "Observation instance with remote result"^^xsd:string ;
  rdfs:label "Observation Pointer 1"^^xsd:string ;
  oml:featureOfInterest <http://my.example.org/wfs%26request=getFeature%26;featureid=789002> ;
  oml:observedProperty <http://vocab.nerc.ac.uk/collection/I01/current/0.1.1/> ;
  oml:phenomenonTime [ a w3time:ProperInterval ;
    w3time:hasBeginning [ a w3time:Instant ;
      w3time:inXSDDateTime "2005-01-11T17:22:25.00"^^xsd:dateTime ] ;
    w3time:hasEnd [ a w3time:Instant ;
      w3time:inXSDDateTime "2005-01-11T18:22:25.00"^^xsd:dateTime ] ] ;
  oml:result <http://my.example.org/results%3f798002%26property=RH> ;
  oml:resultTime "2005-01-11T18:22:25.00"^^xsd:dateTime .
```

**Listing 3** – A sampling station with links to some related observations

```
<http://my.hydrology.example.org/catchments/Potamos#st2>
a samfl:SamplingPoint ;
rdfs:comment "Hydrology sampling station"^^xsd:string ;
oml:relatedObservation <http://my.hydrology.example.org/chemistry/2007/rtg78n> ,
  <http://my.hydrology.example.org/chemistry/2007/rtg108q> ;
samfl:complex [ a samfl:SamplingFeatureComplex ;
  samfl:relatedSamplingFeature
    <http://my.example.org/wfs?request=getFeature;featureid=coll132> ;
  samfl:role http://www.example.org/complex/member ] ;
samfl:sampledFeature <http://my.hydrology.example.org/catchments/Potamos> ;
samfl:shape [ a W3geo:Point ;
  W3geo:alt "350.0"^^xsd:string ;
  W3geo:lat "-37.34"^^xsd:string ;
  W3geo:long "146.2"^^xsd:string ] ;
prov:wasMemberOf <http://my.example.org/wfs?request=getFeature;featureid=coll132> .
```

**Listing 4** – A specimen with provenance and preparation information

```
<http://handle.net/10273/IGSN.SIOabc123> a samfl:Specimen , my:splitCore ,
  <http://www.opengis.net/def/material/OGC-OM/2.0/rock> ;
rdfs:label "SIO specimen abc123"^^xsd:string ;
samfl:sampledFeature my:midAtlanticRidge ;
samfl:samplingMethod <http://ldeo.columbia.edu/sampling/ghostbuster> ;
samfl:samplingTime "2013-06-12T09:25:00.00+11:00"^^xsd:dateTime ;
samfl:samplingLocation [ a W3geo:Point ;
  W3geo:alt -1272.0 ;
  W3geo:lat 24.97 ;
  W3geo:long -45.87 ] ;
samfl:currentLocation <http://example.org/various/Warehouse3/shelf9/box67> ;
samfl:size [ a oml:SimpleMeasure ;
  rdf:value "0.46"^^oml:Number ;
  oml:uom <http://qudt.org/vocab/unit#Kilogram> ] ;
samfl:complex [ a samfl:SamplingFeatureComplex ;
  samfl:relatedSamplingFeature <http://handle.net/10273/IGSN.SIOxyz789> ;
  samfl:role my:split ] ;
prov:wasDerivedFrom <http://handle.net/10273/IGSN.SIOxyz456> ;
prov:wasGeneratedBy [ a prov:Activity ;
  prov:endedAtTime "2013-08-02T08:15:00.00+11:00"^^xsd:dateTime ;
  prov:used <http://handle.net/10273/IGSN.SIOxyz456> ;
  prov:wasAssociatedWith my:JohnDoe ;
  prov:wasInformedBy <http://example.org/various/sf-process/jkl987> ] .
```

**Listing 5** – Alternative formulation of sampling feature complex, based on property-derivation (compare with Listing 4).

```
<http://handle.net/10273/IGSN.SIOabc123>
a samfl:Specimen;
my:split <http://handle.net/10273/IGSN.SIOxyz789> .
my:split a owl:ObjectProperty ;
  rdfs:subPropertyOf samfl:relatedSamplingFeature .
```

## 4. Alignments and mappings

### 4.1. Time and space

Stub classes are used in om-lite and sam-lite to represent time and space concepts. The classes are required to support the definition of classes in the O&M observation and sampling feature models which have constraints involving these types, but the stub classes do not commit the user to any specific existing vocabulary for geometric or temporal objects. When the ontology is used for data, additional axioms must be introduced or will be inferred, that link the stub classes to a concrete representation of time and space, as shown in 3.3. This is typically by asserting that the type used is a sub-class of the stub class. The stub classes are therefore understood to be superclasses of all possible representations of these concepts.

Figure 7 shows possible sub-class relationships linking from W3C Basic Geo [3], GeoSPARQL [43] and the OWL-Time temporal ontology [17], to some of the stub classes from om-lite and sam-lite. Since the stub classes have no properties or constraints (or further superclasses) the subclassing axioms shown in Figure 7 are “conservative”, and thus non-harmful in the sense described by Hogan et al. [19,20]. Nevertheless, such axioms should be introduced cautiously, usually only locally, in the context of data instances, as adding superclasses to legacy classes, also known as ‘ontology hijacking’, risks both performance and reasoning behaviour [19,20].

### 4.2. Quantity

The types oml:Measure and samfl:Measure that appear in Figures 5 and 6, Listing 1 and Table 2 are stubs for a generic scaled quantity. A simple representation is provided as oml:SimpleMeasure, having properties for the amount and unit-of-measure. Various other representations of this concept are available, such as qudt:QuantityValue [18], DUL:Region [16], which could be related to the stub classes by sub-class or equivalent-class relationships similar to those shown above for space and time.

### 4.3. Domain ontologies

Ontologies for observation applications may use one of two approaches to align with om-lite and sam-lite.

1. A new ontology may be explicitly based on om-lite and sam-lite. Classes and properties from om-lite and sam-lite can be used as-is, or else new classes may be specialized from classes in the om-lite and sam-lite ontologies, adopting the axioms and inheriting the existing constraints, and with new relationships and constraints.
2. An existing ontology can be mapped to om-lite and sam-lite by asserting class-class and property-property relationships.

Listing 6 shows relationships to align the OBOE ontology [39] with om-lite. In OBOE the term ‘Observation’ refers to a collection of individual ‘Measurements’ concerning different properties of the same feature of interest, so oboe:Measurement is the atomic concept corresponding with oml:Observation.

Listing 7 shows relationships to align ODM2 [21] with om-lite and sam-lite (the ODM2 resource names are inferred from the ODM2 UML model).

### 4.4. PROV

PROV [36] is the only existing vocabulary used directly in the new ontologies, apart from the basic RDF, RDFS and OWL infrastructure.

The core O&M model concerns the production of data through observation events involving sensors, instruments and other observation processes. Samples are created and transformed by the application of other kinds of processes at specified times and places. Both of these appear to match well to the core PROV model, which is concerned with the production and transformation of Entities through time-bounded Activities, under the influence or control of Agents.

As described above, the motivation for the introduction of PROV in sam-lite was to support flexible description of specimen preparation chains, the details of which vary widely in different disciplines and communities. Hence, the primary axiom linking sam-lite to PROV is

```
samfl:Specimen rdfs:subClassOf prov:Entity .
```

As well as replacing the PreparationStep property in the context of specimens, PROV relationships could also be used in place of some applications of the samplingFeatureComplex property from the Sampling Features model (see Listings 3 and 4). The statement involving prov:wasMemberOf in Listing 3 entails that samfl:SamplingPoint is either equivalent to or subclassed from prov:Entity. So a more general subclassing axiom might be introduced:

```
samfl:SamplingFeature rdfs:subClassOf prov:Entity .
```

The diversity of potential relationships between sampling features within a complex was managed in the original O&M model through a “role” property on the `SamplingFeatureComplex` class, which is implemented directly in `sam-lite` (Table 2). The same functionality can mostly be achieved by sub-properties of PROV properties whose domain and range allow for `prov:Entity`, in particular `prov:wasInfluencedBy` and `prov:wasDerivedFrom`. However, some common relationships between sampling features in a complex are not described using PROV semantics. The geometric relationships that connect stations to a transect, pixels to an image, or specimens to a borehole, etc, are “sibling” relationships, rather than the derivation relationships that are the focus of PROV traces. To retain the general functionality the properties `samfl:complex` and `samfl:relatedSamplingFeature` are included in `sam-lite`.

In O&M, an Observation is an event or activity, during which an observation process (sensor, instrument, algorithm) is responsible for generating a result. There is a straightforward alignment with PROV, as follows:

```

oml:Observation    rdfs:subClassOf    prov:Activity .
oml:result         rdfs:subPropertyOf prov:generated .
oml:result         rdfs:range         prov:Entity .
oml:resultTime     rdfs:subPropertyOf prov:endedAtTime .
oml:Process        rdfs:subClassOf    prov:Agent .
oml:Process        rdfs:subClassOf    prov:Entity .
oml:procedure      rdfs:subPropertyOf prov:wasAssociatedWith .

```

In the context of an Observation, an `oml:Process` (sensor, instrument, observer, algorithm) is classified as primarily an Agent, since it is an actor in the observation activity. An instrument or sensor might also be classified as an Entity for asset management purposes, and ‘Algorithm’ appears to also match `prov:Plan` which is a subclass of `prov:Entity`. Note that there is no inconsistency in this multiple sub-classification, since `prov:Agent` and `prov:Entity` are not disjoint classes.

Sampling processes are also agents, but the processes involved in observations and sampling are distinct, since they generate different outcomes (samples and observation-results, respectively), so:

```

samfl:Process rdfs:subClassOf    prov:Agent .
samfl:Process owl:disjointWith oml:Process .
oml:Process   owl:equivalentClass samfl:ObservationProcess .

```

#### 4.5. SSN Ontology

A potential inconsistency between the Observation classes in the SSN ontology [5] and O&M was noted by Cox [11]. The concern is highlighted by the choice of alignment of SSNO with DOLCE: `ssn:Observation` is conceived as a sub-class of `dul:SocialObject`, which is disjoint with `dul:Event`, while in O&M Observations are intrinsically events, ending at the “result-time”.

A recent paper on SSNO-PROV alignment by Compton et al. [6] helps clarify this. The core of Compton et al.’s SSNO-PROV alignment is as follows:

```

:ActivityOfSensing rdfs:subClassOf    prov:Activity .
ssn:Observation   rdfs:subClassOf    prov:Entity .
ssn:SensorOutput  rdfs:subClassIf    prov:Entity .
ssn:Sensor        rdfs:subClassOf    [
                                owl:unionOf ( prov:Agent prov:Entity )
                                ] .

```

The SSNO Observation class is interpreted as a sub-class of `prov:Entity`, and a new class ‘ActivityOfSensing’ is introduced to correspond to the event or activity that generates the result or output.

In Figure 8 we combine the `om-lite`-PROV alignment described above (section 4.4) with the one from Compton et al. [6]. Notwithstanding the shared name, `ssn:Observation` and `om:Observation` do not play the same role. The new class `ActivityOfSensing` matches `om:Observation`, while `ssn:Observation` describes the *output* or *record of* an observation event. Listing 8 presents a SSNO-`om-lite` alignment derived from these considerations.

SSNO does not address sampling, so there is no overlap with `sam-lite`.

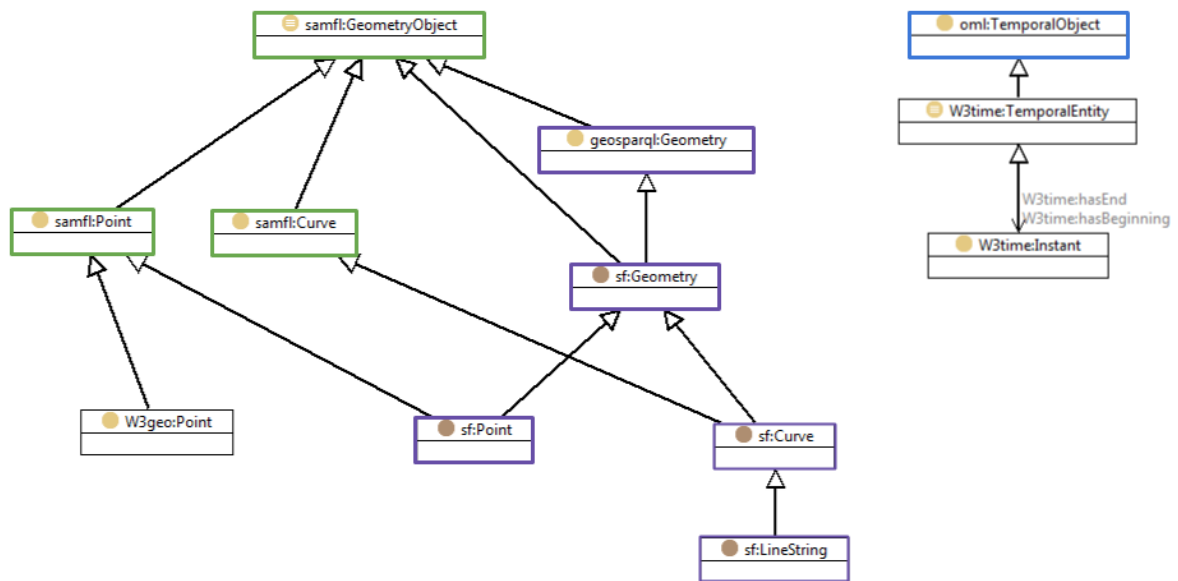


Figure 7 – Alignment of existing ontologies with some of the stub classes for space and time from sam-lite and om-lite. The geosparql: and sf: classes from GeoSPARQL [43] are mapped to samfl: geometry objects through sub-classing. W3geo:Point from the Basic Geo Vocabulary developed by the W3C Semantic Web Interest group [3] is another sub-class of samfl:Point. W3time: classes from OWL-Time [17] are mapped as sub-classes of oml:TemporalObject.

**Listing 6** – Alignment of classes and properties from OBOE [39] with om-lite

oboe-core:Measurement	owl:equivalentClass	oml:Observation .
oboe-core:Protocol	rdfs:subClassOf	oml:Process .
oboe-core:hasContext	owl:equivalentProperty	oml:observationContext .
oboe-core:hasValue	owl:equivalentProperty	oml:result .
oboe-core:ofCharacteristic	owl:equivalentProperty	oml:observedProperty .
oboe-core:ofEntity	owl:equivalentProperty	oml:featureOfInterest .
oboe-core:usesMethod	owl:equivalentProperty	oml:procedure .
oboe-core:usesProtocol	rdfs:subPropertyOf	oml:procedure .

**Listing 7** – Alignment of classes and properties from ODM2 [21] with om-lite and sam-lite.

odm2:ObservationAction	owl:equivalentClass	oml:Observation .
odm2:SamplingFeature	owl:equivalentClass	samfl:SamplingFeature .
odm2:featureOfInterest	owl:equivalentProperty	oml:featureOfInterest .
odm2:result	owl:equivalentProperty	oml:result .
odm2:variable	owl:equivalentProperty	oml:observedProperty .

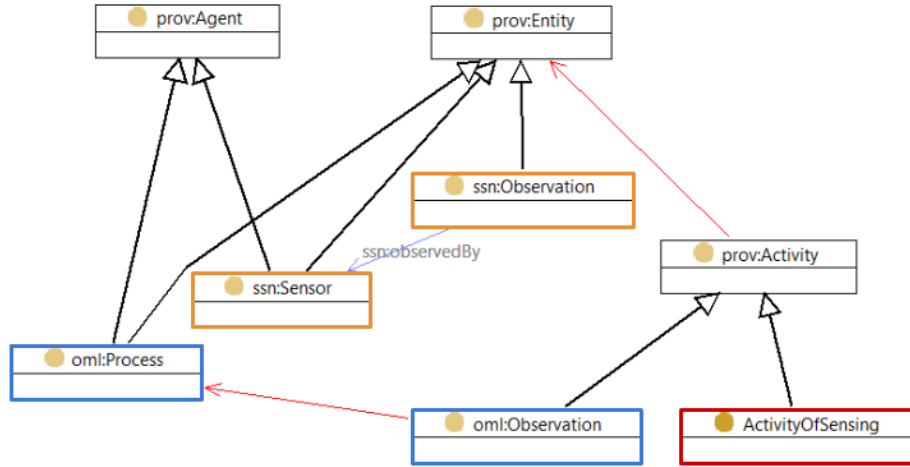


Figure 8 – Alignment of SSNO and O&M with the core PROV classes. Note that ssn:Observation and owl:Observation are subclasses of two disjoint PROV classes (the disjoint relationship is indicated by a red arrow).

**Listing 8** –Alignment of classes and properties from SSNO [5] augmented by Compton et al. [6], with om-lite.

:ActivityOfSensing	owl:equivalentClass	owl:Observation .
ssn:featureOfInterest	owl:equivalentProperty	owl:featureOfInterest .
ssn:observationResult	owl:equivalentProperty	owl:result .
ssn:observationResultTime	owl:equivalentProperty	owl:resultTime .
ssn:observedProperty	owl:equivalentProperty	owl:observedProperty .
ssn:Sensing	rdfs:subClassOf	owl:Process .
ssn:Sensor	rdfs:subClassOf	owl:Process .
ssn:observedBy	rdfs:subPropertyOf	owl:procedure .
ssn:sensingMethodUsed	rdfs:subPropertyOf	owl:procedure .

## 5. Discussion

### 5.1. Dependencies

The primary motivation for this study was to develop an OWL ontology for O&M that does not introduce undesirable dependencies, either to a large infrastructure that was not strictly formalized as an ontology (the ISO model) or to a foundational ontology that imposes a particular world view (e.g. DOLCE). Figure 9 shows the Observation class and its dependencies in each of om-lite, SSNO and OMU. The dependencies shown are those rendered by default by a popular IDE (TopBraid Composer<sup>3</sup>) and therefore provides a sense of what a new user of the ontologies would be confronted with on loading each one. SSNO and OMU both make a significant commitment to an existing

framework (DOLCE, and multiple namespaces representing components of the ISO 19100 series, respectively). om-lite provides a lightweight framework, with only local dependencies.

There is no question that the benefits of aligning a model with an upper- or foundational-ontology are significant. It helps ensure clarity in modeling, and to trap or avoid errors that have unintended reasoning implications. Nevertheless, the various candidate upper-ontologies, such as GFO, BFO, DOLCE [40] (and we may even consider the ISO 19100 series models, and PROV as playing this role) were each designed in a particular context, which may not match all the applications of the new model. For this reason, *a priori* alignment with an external ontology may be undesirable. Rather, alignments with upper-ontologies may be described in a separate graph(s), and loaded selectively for specific reasoning exercises.

<sup>3</sup> TopBraid Composer <http://www.topquadrant.com/tools/ide-topbraid-composer-maestro-edition/>

## 5.2. Application alignment

The existing observation ontologies and models OBOE, ODM2 and SSNO are mapped to om-lite in Listings 6-8. Combining these allows us to infer direct mappings. For example:

```
oboecore:Measurement owl:equivalentClass
                        oml:Observation .
:ActivityOfSensing    owl:equivalentClass
                        oml:Observation .

entails

:ActivityOfSensing    owl:equivalentClass
                        oboecore:Measurement .

and

oboecore:ofCharacteristic owl:equivalentProperty
                        oml:observedProperty .
odm2:variable            owl:equivalentProperty
                        oml:observedProperty .

entails

oboecore:ofCharacteristic owl:equivalentProperty
                        odm2:variable .
```

While these specific inferences could probably have been deduced directly, it is helpful to have a common bridging ontology when dealing with a network of applications using multiple local models or ontologies.

This is demonstrated by a counter example. Even though O&M was used as the primary reference point in a review of prior work presented in the SSN project report [37], the SSNO still ended up using the term ‘Observation’ in a way that is inconsistent with how the term was defined in O&M (as described by Compton et al. [6] and shown above in section 4.5). Arguably, the narrative version of O&M adopted in that review was not fully effective as a lingua franca, whereas a more precise view, such as provided by om-lite, particularly when augmented by the PROV alignment, might have mitigated the problem.

## 5.3. PROV - information resources, or real-world things?

The PROV specification [36] makes it clear that PROV is applicable to things in the real world, as well as to information resources. However, the examples in the W3C specification use prov:Entity almost exclusively for information resources (papers, reports, documents, datasets, graphs). A minor example of a biological specimen (*drosophila-a*) is mentioned in PROV-O, but has a very short provenance chain.

In the alignments proposed here, prov:Entity is the superclass in particular for samfl:Specimen and samfl:SamplingFeature, which are physical or notional objects in the world, not just documents or data. Adoption of PROV solved a local problem in the sampling-features model, but also demonstrates the applicability of PROV to real-world things.

It is interesting to recall that the concept of ‘provenance’ originated in the art and museums world, where the focus is on ‘chain of custody’ of physical artefacts, in support of assessment of authenticity. PROV, on the other hand, focuses on the creation and transformation of entities, as the result of activities under the influence of agents. Custodianship in the conventional mode is less relevant to digital artefacts, which can be reproduced exactly at minimal cost. However, the two considerations come together particularly for specimens, where both transformation (sample preparation) and chain of custody are significant concerns. For example, specimens in forensic investigations, drug tests, or where there are financial market implications, such as assay values in mineral exploration, need careful provenance traces covering both transformation and custody considerations. The application and development of the PROV framework for physical and other real-world entities will be an interesting area of application.

## 5.4. Sampling features

Finally, it is notable that the other observation models and ontologies largely neglect the role of sampling features in the observation process, or subsume them as part of the description of the observation process or sensor model. This is a significant gap, as sampling is ubiquitous in practical observations scenarios, and some common patterns exist, separate from the description of observation processes. Sampling always involves subsetting the ultimate feature of interest in some way, and it is helpful to identify and describe both sampling features and the ultimate feature of interest separately and explicitly.

Spatially defined sampling is common in multiple domains in earth and environmental sciences (features with names like “station”, “transect”, “cross-section”, “swath” etc), and multiple features are typically linked within a sampling strategy (specimens along a borehole; stations on a transect; flight-lines within an aerial survey; pixels within an image). The O&M spatial sampling features model was particularly influenced by Climate Science Modelling Language from the ‘fluid-earth’ community (oceans and atmospheres)

[47], and the specimen model was influenced by a wider variety of use-cases, particularly geochemistry [14] and work in the biodiversity community that also led on to the development of the Biological Collections Ontology (BCO) [46].

The sampling features model in O&M provides a kernel for direct use, or for domain-based extension. Its implementation in sam-lite is thus a very important component of the observation ontologies

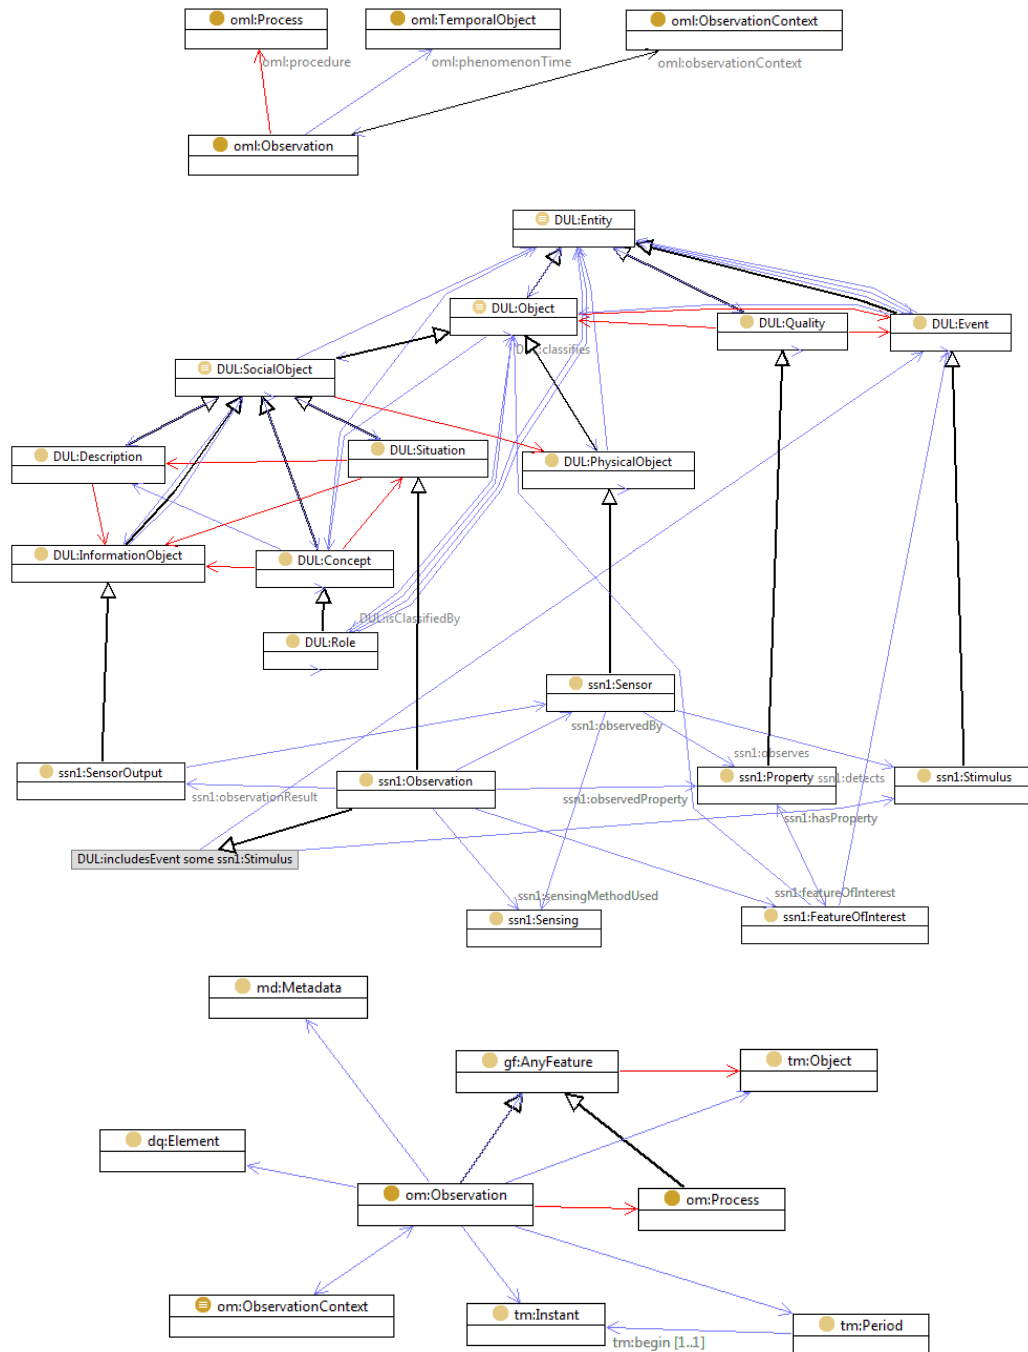


Figure 9 – Comparison of the Observation class and its dependencies. In om-lite (top) the Observation class only links to other classes from om-lite, some of which are stubs, and none of which have super-classes. In SSNO (middle) there are immediate dependencies on super-classes from DOLCE Ultra-lite, each of which have further super-classes with properties that impose strict constraints on the interpretation of the Observation and Sensor classes. For example, `ssn:Observation` is disjoint with `DUL:Event`, and `ssn:Sensor` is always a Physical Object, which excludes algorithms, software agents, and possibly people. In OMU (bottom) the Observation classes requires use of classes from several other ISO 19100 standards, which are generally not well accepted outside the GIS community.

## 6. Summary

We have described lightweight OWL ontologies for observations and measurements, and for sampling features, which implement the concepts from the ISO O&M model. In contrast to previous attempts, the new ontologies have no dependencies on either elaborate ontology networks or foundational ontologies, and thus do not require a user to commit to any existing framework. In particular, the classes defined in om-lite and sam-lite have no external super-classes. And types for geometry, time and measure (quantity value), which are required as the range of some key observation and sampling-feature properties, are implemented as ‘stubs’ with the expectation that they will be substituted at run time by types from an existing vocabulary. Each stub class is understood as the superclass of all concrete representations of geometry, time and measure. This is a potentially generally applicable pattern that maintains the requirement that suitable types be used, but without constraining the implementation in advance.

The single exception to the no-dependencies story is in the model for specimens, which re-uses elements from PROV. The motivation was to overcome some known limitations of the O&M model for specimens. However, we have also explored a more complete alignment with PROV. This is appropriate for the observation model - whose goal is to provide structured provenance information for estimates of property values. A side effect of the PROV alignment has been to clarify some tensions between the O&M model and the SSN Ontology. This also demonstrates that PROV may serve as a kind of upper ontology in alignment exercises.

The new ontologies may be used as-is<sup>4</sup>, but are likely to be of more value in providing a basis for (i) more specialized and application-specific observation ontologies, and also (ii) as a bridging ontology to assist in linking between existing models.

## Acknowledgements

Thanks to David Ratcliffe for helpful pointers on OWL details, and Jonathan Yu for assistance in highlighting the key messages. The reviewers for Semantic Web Journal provided some excellent suggestions based on an impressively

close reading of the text. This work is a contribution towards the harmonization of W3C and Open Geospatial Consortium standards for geospatial data, and was supported by the CSIRO Land and Water Flagship, the Water Information Research and Development Alliance, and the eReefs project.

## References

- [1] D. Beckett, T. Berners-Lee, E. Prud’hommeaux, G. Carothers, RDF 1.1 Turtle, World Wide Web Consortium, 2014. <http://www.w3.org/TR/2014/REC-turtle-20140225/> (accessed May 5, 2014).
- [2] M. Botts, Sensor Model Language (SensorML) | OGC, Open Geospatial Consortium, Wayland, Mass., 2013. <http://www.opengeospatial.org/standards/sensorml> (accessed September 16, 2014).
- [3] D. Brickley, W3C Semantic Web Interest Group, Basic Geo (WGS84 lat/long) Vocabulary, (2004). <http://www.w3.org/2003/01/geo/> (accessed September 26, 2014).
- [4] A. Bröring, C. Stasch, J. Echterhoff, Sensor Observation Service | OGC, Open Geospatial Consortium, Wayland, Mass., 2012. <http://www.opengeospatial.org/standards/sos> (accessed September 16, 2014).
- [5] M. Compton, P. Barnaghi, L. Bermudez, R. García-Castro, O. Corcho, S.J.D. Cox, et al., The SSN ontology of the W3C semantic sensor network incubator group, Web Semant. Sci. Serv. Agents World Wide Web. 17 (2012) 25–32. doi:10.1016/j.websem.2012.05.003.
- [6] M. Compton, D. Corsar, K. Taylor, Sensor Data Provenance: SSNO and PROV-O Together at Last, in: *7th Int. Work. Semant. Sens. Networks*, 2014: p. 16. [http://knoesis.org/ssn2014/paper\\_9.pdf](http://knoesis.org/ssn2014/paper_9.pdf) (accessed April 2, 2015).

---

<sup>4</sup> The om-lite ontology is published at <http://def.seegrid.csiro.au/ontology/om/om-lite>. The sam-lite ontology is

published at <http://def.seegrid.csiro.au/ontology/om/sam-lite>.

- [7] S.J.D. Cox, Observations and Measurements - Part 1 - Observation schema, OGC 07-022r1, 1.0 ed., Open Geospatial Consortium, Wayland, Mass., 2007.  
<http://portal.opengeospatial.org/files/22466>.
- [8] S.J.D. Cox, Observations and Measurements - Part 2 - Sampling Features - OGC 07-002r3, Open Geospatial Consortium, Wayland, Mass., 2007.  
<http://portal.opengeospatial.org/files/22467>.
- [9] S.J.D. Cox, Geographic Information - Observations and Measurements (OGC Abstract Specification Topic 20), 2.0 ed., Open Geospatial Consortium, Wayland, Mass., 2011.  
<http://portal.opengeospatial.org/files/41579> (accessed September 16, 2014).
- [10] S.J.D. Cox, Observations and Measurements - XML Implementation, 2.0 ed., Open Geospatial Consortium, Wayland, Mass., 2011.  
<http://portal.opengeospatial.org/files/41510> (accessed September 16, 2014).
- [11] S.J.D. Cox, An explicit OWL representation of ISO/OGC Observations and Measurements, in: O. Corcho, C. Henson, P. Barnaghi (Eds.), *Proc. 6th Int. Work. Semant. Sens. Networks Co-Located with 12th Int. Semant. Web Conf. (ISWC 2013)*, Sun SITE Central Europe, Sydney, Australia, October 22nd, 2013., 2013: pp. 1–18. <http://ceur-ws.org/Vol-1063/paper1.pdf> (accessed February 3, 2014).
- [12] S.J.D. Cox, Observations to information (Leptoukh Lecture), in: *Proceedings, 2013 Fall Meet. AGU*, American Geophysical Union, San Francisco, 2013.  
<http://abstractsearch.agu.org/meetings/2013/FM/IN42A-01.html> (accessed June 29, 2015).
- [13] S.J.D. Cox, Time Ontology Extended for Non-Gregorian Calendar Applications, *Semant. Web J.* in press (2015).  
<http://www.semantic-web-journal.net/content/time-ontology-extended-non-gregorian-calendar-applications-0> (accessed February 1, 2015).
- [14] S.J.D. Cox, A. Dent, S. Girvan, R. Atkinson, I. Whitehouse, C. Legg, Using the Assay Data Exchange standard with WFS to build a complete minerals exploration data-transfer chain, in: *Proc. Int. Assoc. Math. Geol. Gen. Assem.*, 2006.
- [15] M. Fowler, *Analysis Patterns: Reusable Object Models*, Addison-Wesley, 1997.  
<http://martinfowler.com/books/ap.html> (accessed September 16, 2014).
- [16] A. Gangemi, *Ontology: DOLCE+DnS Ultralite - ODP*, (2010).  
[http://ontologydesignpatterns.org/wiki/Ontology:DOLCE+DnS\\_Ultralite](http://ontologydesignpatterns.org/wiki/Ontology:DOLCE+DnS_Ultralite) (accessed February 13, 2014).
- [17] J.R. Hobbs, F. Pan, *Time Ontology in OWL*, World Wide Web Consortium, 2006.  
<http://www.w3.org/TR/owl-time/> (accessed February 4, 2014).
- [18] R. Hodgson, P.J. Keller, J. Hodges, J. Spivak, *QUDT - Quantities, Units, Dimensions and Types v1.1*, (2013). <http://www.qudt.org/> (accessed March 19, 2014).
- [19] A. Hogan, A. Harth, A. Passant, S. Decker, A. Polleres, Weaving the Pedantic Web, in: *Linked Data Web Work.*, CEUR Workshop Proceedings, Raleigh, North Carolina, USA, April 27, 2010, 2010. [http://ceur-ws.org/Vol-628/ldow2010\\_paper04.pdf](http://ceur-ws.org/Vol-628/ldow2010_paper04.pdf) (accessed October 7, 2014).
- [20] A. Hogan, A. Harth, A. Polleres, SAOR: Authoritative Reasoning for the Web, *Int. J. Semant. Web Inf. Syst.* 5 (2009).  
doi:10.1007/978-3-540-89704-0\_6.
- [21] J.S. Horsburgh, A.K. Aufdenkampe, K.A. Lehnert, E. Mayorga, D.G. Tarboton, I. Zaslavsky, et al., Extending the Interoperability of Sensor and Sample Based Earth Observations Using a Community Information Model, in: *AGU Fall Meet.*, San Francisco, 2013.

[http://jeffh.usu.edu/files/AGU\\_2013\\_ODM2\\_12-5-2013.pptx](http://jeffh.usu.edu/files/AGU_2013_ODM2_12-5-2013.pptx) (accessed October 20, 2014).

- [22] INSPIRE Working Group on Observations & Measurements, D2.9 Guidelines for the use of Observations & Measurements and Sensor Web Enablement-related standards in INSPIRE Annex II and III data specification development, 2.0 ed., European Commission, Brussels, 2014.  
[http://inspire.ec.europa.eu/documents/Data\\_Specifications/D2.9\\_O&M\\_Guidelines\\_v2.0.pdf](http://inspire.ec.europa.eu/documents/Data_Specifications/D2.9_O&M_Guidelines_v2.0.pdf) (accessed June 18, 2014).
- [23] ISO/IEC, ISO/IEC 19501:2005 - Information technology -- Open Distributed Processing -- Unified Modeling Language (UML) Version 1.4.2, International Organization for Standardization, Geneva, 2005.  
[http://www.iso.org/iso/catalogue\\_detail.htm?csnumber=32620](http://www.iso.org/iso/catalogue_detail.htm?csnumber=32620) (accessed February 4, 2014).
- [24] ISO/TC-211, ISO 19108:2002 - Geographic information -- Temporal schema, International Organization for Standardization, Geneva, 2002.  
[http://www.iso.org/iso/catalogue\\_detail.htm?csnumber=26013](http://www.iso.org/iso/catalogue_detail.htm?csnumber=26013) (accessed February 13, 2014).
- [25] ISO/TC-211, ISO 19115:2003 - Geographic information -- Metadata, International Organization for Standardization, Geneva, 2003.  
[http://www.iso.org/iso/catalogue\\_detail.htm?csnumber=26020](http://www.iso.org/iso/catalogue_detail.htm?csnumber=26020) (accessed March 20, 2014).
- [26] ISO/TC-211, ISO 19107:2003 - Geographic information -- Spatial schema, International Organization for Standardization, Geneva, 2003.  
[http://www.iso.org/iso/catalogue\\_detail.htm?csnumber=26012](http://www.iso.org/iso/catalogue_detail.htm?csnumber=26012) (accessed February 13, 2014).
- [27] ISO/TC-211, ISO 19101:2002 - Geographic information -- Reference model, International Organization for Standardization, Geneva, 2005.

[http://www.iso.org/iso/catalogue\\_detail.htm?csnumber=26002](http://www.iso.org/iso/catalogue_detail.htm?csnumber=26002) (accessed February 13, 2014).

- [28] ISO/TC-211, ISO/TS 19103:2005 - Geographic information -- Conceptual schema language, International Organization for Standardization, Geneva, 2005.  
[http://www.iso.org/iso/catalogue\\_detail.htm?csnumber=37800](http://www.iso.org/iso/catalogue_detail.htm?csnumber=37800) (accessed February 13, 2014).
- [29] ISO/TC-211, ISO 19109:2005 - Geographic information -- Rules for application schema, International Organization for Standardization, Geneva, 2005.  
[http://www.iso.org/iso/catalogue\\_detail.htm?csnumber=39891](http://www.iso.org/iso/catalogue_detail.htm?csnumber=39891) (accessed February 13, 2014).
- [30] ISO/TC-211, ISO 19142:2010 - Geographic information -- Web Feature Service, International Organization for Standardization, Geneva, 2010.  
[http://www.iso.org/iso/iso\\_catalogue/catalogue\\_tc/catalogue\\_detail.htm?csnumber=42136](http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=42136) (accessed September 16, 2014).
- [31] ISO/TC-211, ISO 19156:2011 - Geographic information -- Observations and measurements, International Organization for Standardization, Geneva, 2011.  
[http://www.iso.org/iso/catalogue\\_detail.htm?csnumber=32574](http://www.iso.org/iso/catalogue_detail.htm?csnumber=32574) (accessed February 4, 2014).
- [32] ISO/TC-211, ISO 19157:2013 - Geographic information -- Data quality, International Organization for Standardization, Geneva, 2013.  
[http://www.iso.org/iso/home/store/catalogue\\_tc/catalogue\\_detail.htm?csnumber=32575](http://www.iso.org/iso/home/store/catalogue_tc/catalogue_detail.htm?csnumber=32575) (accessed November 7, 2014).
- [33] ISO/TC-211, ISO/DIS 19150-2:2014 - Geographic information -- Ontology -- Part 2: Rules for developing ontologies in the Web Ontology Language (OWL), International Organization for Standardization, Geneva, 2014.  
[http://www.iso.org/iso/catalogue\\_detail.htm?](http://www.iso.org/iso/catalogue_detail.htm?)

- csnumber=57466 (accessed February 7, 2014).
- [34] K. Janowicz, M. Compton, The Stimulus-Sensor-Observation Ontology Design Pattern and its Integration into the Semantic Sensor Network Ontology, in: *3rd Int. Work. Semant. Sens. Networks*, 2010. [http://geog.ucsb.edu/~jano/Semantic\\_Sensor\\_Ontology\\_2010.pdf](http://geog.ucsb.edu/~jano/Semantic_Sensor_Ontology_2010.pdf) (accessed September 16, 2014).
- [35] J. Kunze, T. Baker, The Dublin Core Metadata Element Set, IETF RFC. 5013 (2007). <http://dublincore.org/documents/dces/> (accessed March 30, 2014).
- [36] T. Lebo, S. Sahoo, D. McGuinness, PROV-O: The PROV Ontology, (2013). <http://www.w3.org/TR/prov-o/> (accessed February 13, 2014).
- [37] L. Lefort, C. Henson, K. Taylor, P. Barnaghi, M. Compton, O. Corcho, et al., Incubator Report - Semantic Sensor Network Incubator Group, W3C, 2011. [http://www.w3.org/2005/Incubator/ssn/wiki/Incubator\\_Report](http://www.w3.org/2005/Incubator/ssn/wiki/Incubator_Report) (accessed February 13, 2014).
- [38] F. Maali, J. Erickson, Data Catalog Vocabulary (DCAT), World Wide Web Consortium, Cambridge, Mass. USA, 2014. <http://www.w3.org/TR/vocab-dcat/> (accessed October 20, 2014).
- [39] J. Madin, S. Bowers, M. Schildhauer, S. Krivov, D. Pennington, F. Villa, An ontology for describing and synthesizing ecological observation data, *Ecol. Inform.* 2 (2007) 279–296. doi:10.1016/j.ecoinf.2007.05.004.
- [40] V. Mascardi, V. Cordi, P. Rosso, A Comparison of Upper Ontologies, in: M. Baldoni, A. Boccalatte, F. De Paoli, M. Martelli, V. Mascardi (Eds.), *Seneca Edizioni* Torino, 2007: pp. 55–64. doi:10.1.1.107.1689.
- [41] B. Motik, B.C. Grau, I. Horrocks, Z. Wu, A. Fokoue, C. Lutz, OWL 2 Web Ontology Language Profiles (Second Edition), World Wide Web Consortium, Cambridge, Mass. USA, 2012. <http://www.w3.org/TR/owl2-profiles/> (accessed October 20, 2014).
- [42] G. Percivall, OGC Reference Model (ORM), Open Geospatial Consortium, Wayland, Mass., 2011. <http://www.opengeospatial.org/standards/orm> (accessed March 20, 2014).
- [43] M. Perry, J. Herring, OGC GeoSPARQL – a geographic query language for RDF data., Open Geospatial Consortium, 2012. <https://portal.opengeospatial.org/files/47664> (accessed December 12, 2012).
- [44] C. Stasch, K. Janowicz, A. Bröring, I. Reis, W. Kuhn, A stimulus-centric algebraic approach to sensors and observations, in: *Lect. Notes Comput. Sci. (including Subser. Lect. Notes Artif. Intell. Lect. Notes Bioinformatics)*, 2009: pp. 169–179. doi:10.1007/978-3-642-02903-5\_17.
- [45] P. Vretanos, Web Feature Service | OGC Document 09-025r1, 2.0 ed., Open Geospatial Consortium Inc., Wayland, Mass., 2010. <http://www.opengeospatial.org/standards/wfs> (accessed September 16, 2014).
- [46] R.L. Walls, J. Deck, R. Guralnick, S. Baskauf, R. Beaman, S. Blum, et al., Semantics in support of biodiversity knowledge discovery: an introduction to the biological collections ontology and related ontologies., *PLoS One*. 9 (2014) e89606. doi:10.1371/journal.pone.0089606.
- [47] A. Woolf, B. Lawrence, R. Lowry, K. Kleese van Dam, R. Cramer, M. Gutierrez, et al., Data integration with the Climate Science Modelling Language, *Adv. Geosci.* 8 (2006) 83–90. doi:10.5194/adgeo-8-83-2006.