

Neural Axiom Network for Knowledge Graph Reasoning

Juan Li^{§ a}, Xiangnan Chen^a, Hongtao Yu^a, Jiaoyan Chen^b and Wen Zhang^{§* c}

^a College of Computer Science and Technology, Zhejiang University, 38 Zheda Rd, Hangzhou, China

E-mails: lijuan18@zju.edu.cn, xnchen2020@zju.edu.cn, yuhongtaoaaa@zju.edu.cn

^b Department of Computer Science, University of Oxford, 15 Parks Rd, Oxford OX1 3QD, UK

E-mail: jiaoyan.chen@cs.ox.ac.uk

^c School of Software Technology, Zhejiang University, 38 Zheda Rd, Hangzhou, China

E-mail: wenzhang2015@zju.edu.cn

Abstract. Knowledge graphs (KGs) generally suffer from incompleteness and incorrectness problems due to the automatic and semi-automatic construction process. Knowledge graph reasoning aims to infer new knowledge or detect noises, which is essential for improving the quality of knowledge graphs. In recent years, various KG reasoning techniques, such as symbolic- and embedding-based methods, have been proposed and shown strong reasoning ability. Symbolic-based reasoning methods infer missing triples according to predefined rules or ontologies. Although rules and axioms have proven to be effective, it is difficult to obtain them. While embedding-based reasoning methods represent entities and relations of a KG as vectors, and complete the KG via vector computation. However, they mainly rely on structural information, and ignore implicit axiom information that are not predefined in KGs but can be reflected from data. That is, each correct triple is also a logically consistent triple, and satisfies all axioms. In this paper, we propose a novel **NeuRAL** Axiom Network (**NeuRAN**) framework that combines explicit structural and implicit axiom information. It only uses existing triples in KGs without introducing additional ontologies. Specifically, the framework consists of a knowledge graph embedding module that preserves the semantics of triples, and five axiom modules that encode five kinds of implicit axioms using entities and relations in triples. These axioms correspond to five typical object property expression axioms defined in OWL2, including *ObjectPropertyDomain*, *ObjectPropertyRange*, *DisjointObjectProperties*, *IrreflexiveObjectProperty* and *AsymmetricObjectProperty*. The knowledge graph embedding module and axiom modules respectively compute the scores that the triple conforms to the semantics and the corresponding axioms. Evaluations on KG reasoning tasks show the efficiency of our method. Compared with knowledge graph embedding models and CKRL, our method achieves comparable performance on noise detection and triple classification, and achieves significant performance on link prediction. Compared with TransE and TransH, our method improves the link prediction performance on the Hit@1 metric by 22.4% and 21.2% on WN18RR-10% dataset respectively.

Keywords: Knowledge Graph Reasoning, Knowledge Graph Embedding, Noise Detection, Triple Classification, Link Prediction

1. Introduction

Knowledge Graphs (KGs) are represented as multi-relational directed graphs composed of entities as nodes and relations as edges, where knowledge is organized in the form of triples (*subject entity*, *relation*, *object entity*), abbreviated as (*s*, *r*, *o*). Typical KGs like

DBpedia [1], Freebase [2], Wikidata [3], and Yago [4], have played a pivotal role in a broad range of applications, such as question answering [5] and recommender system [6]. Since KGs are usually automatically constructed and contain billions of triples, it is inevitable that they may suffer from incompleteness and incorrectness. For example, 71% of people in Freebase have no place of birth, and 94% have no known parents [7]. While Wikipedia is estimated to have 2.8% of its statements wrong [8]. To deal with these issues,

[§]Equal contribution.

*Corresponding author.

many knowledge graph reasoning methods have been proposed and received increasing attention. There are two mainstream techniques, including symbolic- and embedding-based methods.

Symbolic-based methods [9–12] use given logic rules or ontologies for KG reasoning, and can achieve good performance. For example, suppose an axiom *DisjointObjectProperties(:hasParent :hasSpouse)* has been already defined in a KG, indicating that the relations *hasSpouse* and *hasParent* are disjoint. For the two triples (*Linda, hasSpouse, Bruce*) and (*Linda, hasParent, Bruce*) in the KG, if the former is correct, the latter will be classified as incorrect. The reason is that a person’s spouse can not be the parent of this person. Although such methods are more reliable and human-interpretable, they require rich ontologies which are usually missing or incomplete in KGs. Moreover, it is tedious to define and maintain axioms manually. Thus, we explore how to encode implicit axioms with only triples for KG reasoning in this paper.

Embedding-based methods, such as translation-based methods [13–15], semantic-based methods [16, 17] and neural network methods [18–20], embed entities and relations into low-dimensional vector space. They use vector computation to complete knowledge graphs, which is scalable and efficient. However, despite the success of embedding models, most of them focus on structural information without taking implicit axiom information into consideration. Take implicit domain axiom as an example. For the correct triple (*Linda, hasSpouse, Bruce*), even in the case of lacking type of the subject entity *Linda* and domain of the relation *hasSpouse*, we can infer that it satisfies *domain* axiom.

In this paper, we propose a neural axiom network framework NeuRAN for KG reasoning. This framework not only encodes explicit structural information through a knowledge graph embedding model, but also implicit axiom information through neural networks. The main idea behind is that even ontology information is not explicitly defined in the given KG, any correct triple satisfies all axioms. Thus, the score to measure the plausibility of each triple is composed of a score from structural information and five axiom scores from axiom information. Here we consider five different axioms corresponding to five typical object property expression axioms selected from OWL2 ontology language^{*}, including *ObjectProperty-*

Domain, *ObjectPropertyRange*, *DisjointObjectProperties*, *IrreflexiveObjectProperty* and *AsymmetricObjectProperty*. As *domain* and *range* axioms are related to type compatibility, we distinguish type and semantic embeddings. Each entity has one type embedding and one semantic embedding. Each relation has two type embeddings (i.e., subject and object entity types excepted by the relation) and one semantic embedding. We encode inherent structure of triples via an embedding module to learn semantic embeddings of entities and relations. In this paper, TransE and TransH are taken as examples of knowledge graph embedding modules to show the validity of our method. They can be replaced with other KGE models. Without predefined axioms, we introduce five axiom modules to encode axioms that are implicit in triples. The design of the axiom modules are based on the conditions satisfied by the axioms as listed in Table 1. Specifically, for a triple (s, r, o), *domain/range* axiom module concentrates on type compatibility between subject/object entity type embedding expected by the relation and type embedding of the subject/object entity. *Disjoint* axiom module focuses on compatibility of two relations with the same subject and object entity. *Irreflexive* axiom module encodes whether the relation is irreflexive and whether $s = o$. And *asymmetric* axiom module encodes whether the relation is asymmetric and whether (o, r, s) is also in the KG. For each axiom module, the output is a probability score range from 0 to 1, indicating how well the triple satisfies the axiom. The closer the value is to 1, the more likely the triple is to conform the axiom. For example in Figure 1, the triple (*United Kingdom, occupation, novelist*) violates *domain* axiom. Thus, the expected subject entity vector of the relation *occupation* and type embedding of the subject entity *United Kingdom* may get a low *domain* axiom score close to 0.

In summary, our main contributions are as follows:

- We raise the problem of neural axiom learning, in which axiom information is not given but can be reflected by and learned from existing triples in KGs.
- We propose a framework NeuRAN that uses a knowledge graph embedding module and five axiom modules to encode explicit structural and implicit axiom information respectively.
- We evaluate NeuRAN on datasets with different ratio of noises. The experimental results demonstrate the effectiveness of our method for knowledge graph reasoning.

^{*}<https://www.w3.org/TR/owl2-primer/>

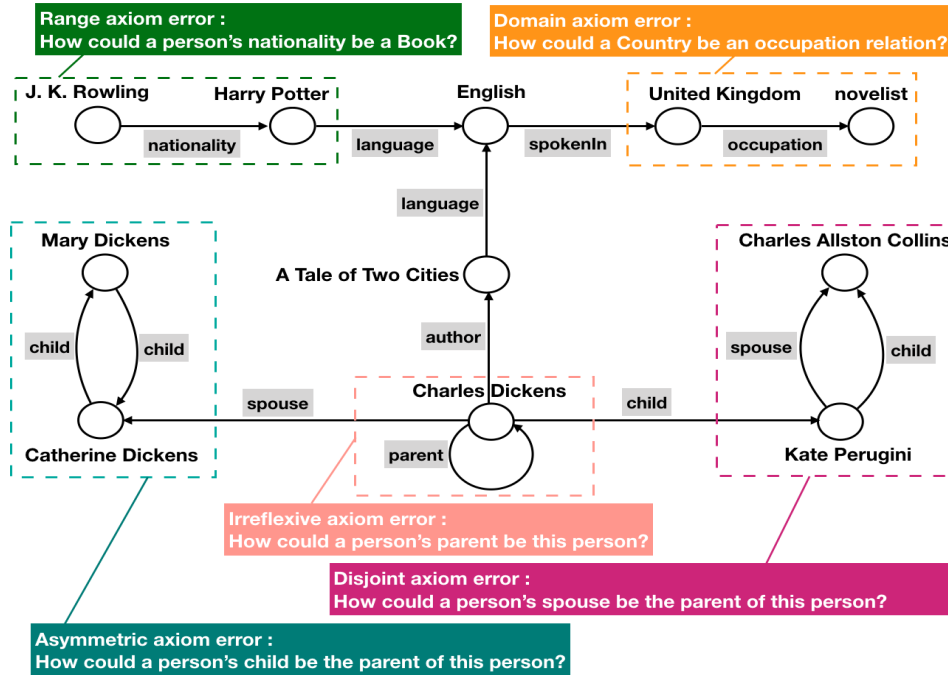


Fig. 1. In the hypothetical knowledge graph, there may exist erroneous triples. The reason for these errors is that the triples do not conform to the axioms considered in this paper, including *domain*, *range*, *disjoint*, *irreflexive* and *asymmetric* axioms.

2. Related work

We discuss the following three lines of research work that are closely relevant to this paper.

2.1. Symbolic-based Reasoning

Symbolic-based reasoning methods aim at inferring new knowledge or detecting noises with the help of rules or ontologies, and show good reasoning ability. Due to the incompleteness of rules and axioms, and the time-consuming process of annotating them, existing methods of using ontologies for reasoning are usually accompanied by enrichment of ontology information. For example, inductive logic programming (ILP) has been used to mine logical rules. But it has limitations on the open-world assumption of KGs, AMIE [9] and AMIE+ [10] make up for this shortcoming by introducing an altered confidence metric based on the partial completeness assumption. With the rules generated with AMIE+, [21] proposes to discover inverse and symmetric axioms by applying the predefined reasoning rules. Moreover, to enrich ontologies with disjointness axioms, [22] presents a set of inductive methods based on statistical inductive learning, including correlation computing and association rule mining. As

it evaluates the validity of association rule mining by computing the precision and recall scores, [23] not only discusses the precision and recall, but also analyzes quality of disjoint axioms acquired. In addition to disjoint axiom, enriching DBpedia ontology with domain and range restrictions, as well as class disjointness axioms is also discussed [24]. The enhanced ontologies are further used for error detection.

2.2. Embedding-based Reasoning

Knowledge graph embedding methods embed entities and relations of a KG into a continuous vector space to preserve the structure information of the KG. There are mainly three categories of embedding models: translational distance, semantic matching and neural network models. Translational distance models learn embeddings by translating a subject entity to an object entity through a relation. For example, TransE [13] represents entities and relations in the same vector space and assumes $(s + r)$ to be close to o , where s, r, o are vector embeddings for s, r and o respectively. However, it has difficulty dealing with complex relations. To overcome the flaws, TransH [14] introduces relation-specific hyperplanes to allow entities have different embeddings in different relations. TransR [15]

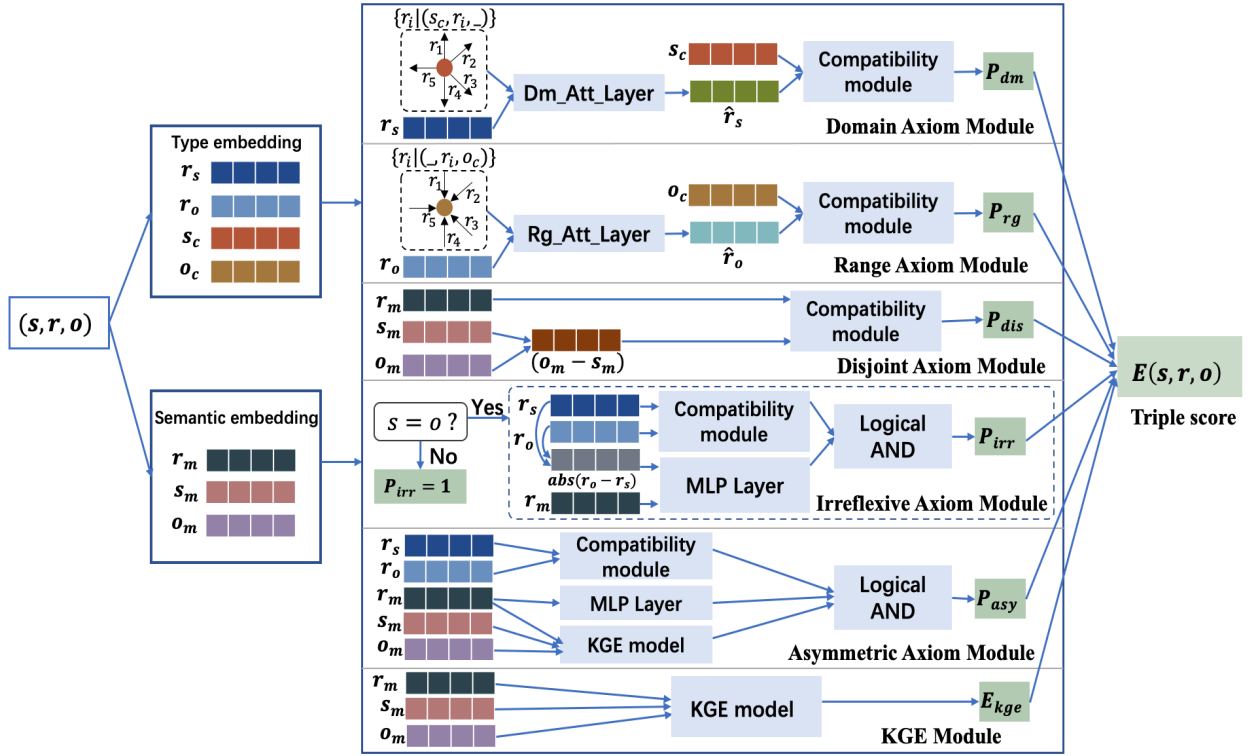


Fig. 2. The key idea of our framework. For the input triple (s, r, o) , we use one type embedding (s_c, o_c) and one semantic embedding (s_m, o_m) to represent the entities, and use two type embeddings (r_s, r_o) and one semantic embedding (r_m) to represent the relation. The triple score is composed of the scores from the six modules. The domain/range axiom module calculates the compatibility between the head/tail entity type embedding and the relation embedding generated via a domain/range attention layer. The disjoint axiom embedding calculates the compatibility between semantic embedding of the input relation and other relations that have the same head and tail entities. The irreflexive and asymmetric axiom modules calculate the axiom scores with the type or semantic embeddings of entities and relations in the condition of lacking these axioms. The KGE module is a knowledge graph embedding model.

builds entity and relation embeddings in separate entity and relation spaces. And TransD [25] constructs mapping matrices dynamically. Similarly, TorusE [26] and RotatE [27] use lie groups and rotations for translation respectively. Semantic matching models measure plausibility by matching implicit semantics of entities and relations. DistMult [16] uses a formulation of bilinear model to represent entities and relations. ComplEx [17] extends DistMult by introducing complex-valued embeddings so as to better model asymmetric relations. HolE [28] makes use of circular correlation of embeddings to learn compositional representations and semantically matches circular correlation with the relation embedding. Apart from that, researchers have raised interests in applying neural networks for knowledge graph reasoning. ConvE [18] and ConvKB [19] employ convolutional neural network to achieve better link prediction performance. CapsE [20] explores a capsule network to model triples. Moreover, KGTm

[29] and CKRL [30] measure trustworthiness or confidence of triples.

2.3. Hybrid Reasoning

Another line of work concerns hybrid methods for KG reasoning, such as the combination of symbolic- and embedding-based reasoning, and the combination of symbolic and statistical reasoning. For the former methods, TransC [31] learns SubClassOf axiom between types by encoding each type as a sphere and each entity as a vector. Besides, SetE [32] computes two axioms SubClassOf and SubPropertyOf in subsumption by employing linear programming methods on embeddings, focusing on domain, range or subClassOf axioms. Recently, IterE [33] iteratively learns embeddings and rules, considers seven object property expression axioms for rule learning. It combines rule learning and embedding learning to improve the quality of sparse entity embeddings by injecting new

Table 1

Five types of object property expression axioms selected from OWL2 ontology language. OP is the short for ObjectProperty. OPE denotes Object Property Expression, and x, y, z are entity variables. Δ_I is a nonempty set called the object domain. \cdot^{OP} is an object property interpretation function. When translating axioms into examples in KG according to condition, we replace OPE in axioms with a relation.

Object Property Axioms	Condition	Examples
OPDomain(OPE CE)	$\forall(x, y) \in (OPE)^{OP}$ implies $x \in (CE)^C$	Domain(hasWife, Man)
OPRange(OPE CE)	$\forall(x, y) \in (OPE)^{OP}$ implies $y \in (CE)^C$	Range(hasWife, Woman)
DisjointOP(OPE ₁ ...OPE _n)	$(OPE_j)^{OP} \cap (OPE_k)^{OP} = \emptyset$ for each $1 \leq j \leq n$ and each $1 \leq k \leq n$ such that $j \neq k$	Disjoint(hasParent, hasSpouse)
IrreflexiveOP(OPE)	$\forall x : x \in \Delta_I$ implies $(x, x) \notin (OPE)^{OP}$	Irreflexive(parentOf)
AsymmetricOP(OPE)	$\forall(x, y) \in (OPE)^{OP}$ implies $(y, x) \notin (OPE)^{OP}$	Asymmetric(hasChild)

triples about sparse entities according to the scores of the axioms as well as to generate high quality rules. As for the latter, the statistic-based methods such as SDType and SDValidate [34], exploit statistical distributions of types and relations. SDType deduces missing type information based on statistics about the usage of relations with entities of known type. And SDValidate measures the deviation between actual types of the subject and/or object and the apriori probabilities given by the distribution. Furthermore, [35] first exploits a combination of entailment vectors, entailment weights, and a consistency vector to encode knowledge as embeddings in ontology streams to deal with concept drifts. Axioms are taken as input to its prediction model. The difference is that in our method, axioms are not given. We design the axiom modules with the help of the definition of axioms.

3. Method

We begin this section by briefly describing some notations. We denote a knowledge graph as $\mathcal{G} = \{(s, r, o) \subset \mathcal{E} \times \mathcal{R} \times \mathcal{E}\}$, where $s, o \in \mathcal{E}$, $r \in \mathcal{R}$, \mathcal{E} is the entity set, and \mathcal{R} is the relation set. (s, r, o) is a triple indicating the relation r between the subject entity s and the object entity o . Throughout this paper, we use bold letters to denote vectors. For example, $\mathbf{s}, \mathbf{r}, \mathbf{o}$ are the embedding vectors of s, r, o . The abbreviations $DM(dm)$, $RG(rg)$, $DIS(dis)$, $IRRE(irre)$ and $ASY(asy)$ respectively correspond to the implicit *domain*, *range*, *disjoint*, *irreflexive* and *asymmetric* axioms.

Then, we introduce the neural axiom network NeuRAN that combines a knowledge graph embedding module and five axiom modules (§3.1). Afterwards, we introduce the KGE module which is used to encode explicit structural information (§3.2), and the five axiom modules which aim to encode five kinds of implicit axiom information (§3.3).

3.1. Neural Axiom Network

We present our neural axiom network NeuRAN in Figure 2, where the overall score of each triple is composed of a semantic score from KGE module, and five axiom scores from five axiom modules (i.e., *domain*, *range*, *disjoint*, *irreflexive* and *asymmetric* axiom modules.). For each axiom module, the score indicates the probability that the axiom holds. The assumption is that probability values of these axioms intensify or mitigate the probability of existence of a triple. Thus, the score of the triple (s, r, o) is defined as:

$$E(s, r, o) = E_{kge} + \lambda \cdot [(1 - P_{dm}) + (1 - P_{rg}) + (1 - P_{dis}) + (1 - P_{irr}) + (1 - P_{asy})] \quad (1)$$

The energy function $E(s, r, o)$ consists the score E_{kge} from the knowledge graph module and five axiom scores from the axiom modules. λ is the weight of axiom scores. E_{kge} is to compute a structure-based score, which can be obtained via any knowledge graph embedding models [36]. TransE and TransH are considered as examples. A lower E_{kge} indicates that the triple is more likely to be correct. The axiom scores P_{dm} , P_{rg} , P_{dis} , P_{irr} and P_{asy} correspond to probabilities that the corresponding axioms are satisfied, where *dm*, *rg*, *dis*, *irr* and *asy* are respectively domain, range, disjoint, irreflexive and asymmetric axioms. Therefore, the higher P_{dm} , P_{rg} , P_{dis} , P_{irr} , P_{asy} , and the lower $(1 - P_{dm})$, $(1 - P_{rg})$, $(1 - P_{dis})$, $(1 - P_{irr})$, $(1 - P_{asy})$ imply that the triple satisfies the corresponding neural axiom with a higher probability.

Following the conventional training strategy of previous models, we train NeuRAN based on the local-closed world assumption. In this case, the observed triples in KGs are regarded as positive triples, while the unobserved ones are regarded as negative triples. We utilize a margin-based ranking loss on pair-wise score

functions (i.e., $E(s, r, o)$ and $E(s', r', o')$) for training, the loss function L is defined as:

$$\mathcal{L} = \sum_{(s,r,o) \in T} \sum_{(s',r',o') \in T'} \max(0, E(s, r, o) + \gamma - E(s', r', o')) \quad (2)$$

where γ is a margin hyper-parameter, $E(s, r, o)$ and $E(s', r', o')$ are respectively the overall energy function of the positive triple (s, r, o) and the negative triple (s', r', o') . T and T' are the positive and negative triple sets. As negative triples and axioms are not given, we generate negative triples by randomly corrupting the subject or object entity, and make sure the replaced triples do not exist in the knowledge graph:

$$T' = \{(s', r, o) | s' \in \mathcal{E}\} \cup \{(s, r, o') | o' \in \mathcal{E}\}, \quad (3)$$

$$(s, r, o) \in T, (s', r, o) \notin T \text{ and } (s, r, o') \notin T$$

The training objective is to minimize the loss function \mathcal{L} to learn embeddings of entities and relations, as well as parameters involved in axiom modules. The learned embeddings and parameters are applied to complete downstream tasks, such as noise detection, triple classification and link prediction.

It is worth mentioning that, we attempt to introduce type embeddings in the design of the model. Considering *domain/range* axioms are associated with type compatibility, and type information is not provided, we distinguish type embeddings from semantic embeddings. Following the type-sensitive models TypeDM and TypeComplex [37], each entity is represented as two vectors (one type embedding and one semantic embedding), and each relation is represented as three vectors (two type embeddings and one semantic embedding). Take the triple (s, r, o) as an example. For entities, we use type embeddings (s_c and o_c) and semantic embeddings (s_m and o_m) to represent the subject entity s and the object entity o . For the relation, r_s and r_o represent subject type and object type embeddings expected by the relation r , and r_m is the semantic embedding of r .

3.2. KG Embedding Module

The knowledge graph embedding module of the framework concerns the learning of a function E_{kge} , which is designed to score each triple based on the

structural information in KGs. Our framework can use any knowledge graph embedding model as the knowledge graph embedding module. In the experiments, we take the two embedding models TransE and TransH as examples to verify our method.

3.2.1. TransE

TransE is the simplest translation-based model, which interprets relations as translating operations between subject and object entities. Given a triple (s, r, o) , it follows the assumption that $s + r \approx o$ when (s, r, o) holds. Thus, the semantic score of the triple based on TransE is calculated as:

$$E_{kge} = \|s_m + r_m - o_m\|_{L_1/L_2} \quad (4)$$

where L_1 and L_2 respectively denote the L_1 and L_2 norm. s_m , r_m and o_m are the semantic embeddings of the subject entity, the relation and the object entity respectively. The smaller value of the scoring function E_{kge} , the higher the probability that the triple is correct.

3.2.2. TransH

TransH extends TransE by translating on hyperplanes, which models the relation r as a vector on a hyperplane with w_r as the normal vector. It enables an entity to have distinct representations when involved in different relations. Similar to TransE, the score function of TransH is defined as:

$$E_{kge} = \|(s_m)_\perp + r_m - (o_m)_\perp\|_{L_1/L_2} \quad (5)$$

where the projections $(s_m)_\perp = s_m - w_r^\top s_m w_r$, and $(o_m)_\perp = o_m - w_r^\top o_m w_r$. It restricts $\|w_r\|_2 = 1$. The score is low if (s, r, o) holds, and is high otherwise.

3.3. Five Axiom Modules

In addition to the focus on structural information, we also consider the inherent implicit axioms that exist in triples. Although axioms are not pre-given, it is intuitive that a correct triple is also a logically consistent triple. That is any correct triple satisfies all the five axioms, including *domain*, *range*, *disjoint*, *irreflexive*, and *asymmetric* axioms. For example, in the case of missing domain and range of the relation *nationality*, and types of the entities *J. K. Rowling* and *United Kingdom*, we can infer the triple $(J. K. Rowling, nationality, United Kingdom)$ satisfies *domain* and *range* axioms by its correctness.

The design of the axiom modules is based on the definition of these axioms. To be specific, for *do-*

1 *main/range* axioms, the type embedding of the sub-
 2 ject/object entity expected by the relation $\mathbf{r}_s/\mathbf{r}_o$ and the
 3 type embedding of the subject/object entity $\mathbf{s}_c/\mathbf{o}_c$ are
 4 used to calculate a type compatibility score. For *dis-*
 5 *joint* axiom, the semantic compatibility of any two re-
 6 lations with the same subject and object entities are
 7 discussed. We assume that $(\mathbf{o}_m - \mathbf{s}_m)$ represents the
 8 shared semantic embedding of the relation for the sub-
 9 ject to be s and object to be o . Then the similar score
 10 of \mathbf{r}_m and $(\mathbf{o}_m - \mathbf{s}_m)$ will be calculated to reflect how
 11 well the disjoint axiom is satisfied. For *irreflexive* ax-
 12 iom, whether the relation is irreflexive, and whether the
 13 subject entity is the same as the object entity ($s = o$?)
 14 are considered. For *asymmetric* axiom, whether the re-
 15 lation is asymmetric, and whether the symmetric triple
 16 of the input triple exists ($(o, r, s) \in G$?) are concerned.
 17 We then introduce these typical axioms in detail.

19 3.3.1. Domain Axiom Module

20 Domain axiom module focuses on type compatibil-
 21 ity between the subject entity type expected by the
 22 relation r and type of the subject entity s . TypeDM
 23 uses the function $C(\mathbf{s}_c, \mathbf{r}_s) = \sigma(\mathbf{s}_c \cdot \mathbf{r}_s)$ to mea-
 24 sure the compatibility by calculating a score with the
 25 type embeddings of subject entity \mathbf{s}_c and the subject
 26 entity type embedding expected by the relation \mathbf{r}_s .
 27 However, the subject type expected by the given re-
 28 lation may be diverse. For example, given the triple
 29 (*Soul(film), language, English*), the subject type ex-
 30 pected by the relation *language* can be an entity in the
 31 class of *Person, Book* or *Film*. **To capture type of the**
 32 **subject entity expected by the relation precisely, we**
 33 **consider both the current relation and the other rela-**
 34 **tions of the subject entity. Suppose the subject entity**
 35 **has relations *starring* and *running time*, we can infer**
 36 **that the subject entity expected by the relation is more**
 37 **likely to be in the class of *Film*. As the relations may**
 38 **have strong correlations with the given relation, such**
 39 **as *starring* and *language*, or differ greatly such as *run-***
 40 ***ning time* and *language*, they contribute differently to**
 41 **the subject entity type embedding expected by the cur-**
 42 **rent given relation. We apply an attention mechanism**
 43 **to the relation r and the relation set of the subject en-**
 44 **tity $\mathcal{R}(s) = \{r_i | (s, r_i, e) \in \mathcal{G}\}$, where e denotes any**
 45 **entity in the KG. By adopting a domain attention layer**
 46 **(Dm_Att_Layer), we generate the subject type embed-**
 47 **ding expected by the relation $\hat{\mathbf{r}}_s$ based on the relations**
 48 **in $\mathcal{R}(s)$. We compute an attention weight for each re-**
 49 **lation of the subject entity, and the importance is de-**
 50 **noted by a_i . It reflects how relevant or important the**

1 **relation r_i is to \mathbf{r}_s .**

$$2 \quad a_i = f(\mathbf{r}_s, \mathbf{r}_i) = \mathbf{r}_s^T \mathbf{r}_i, r_i \in \mathcal{R}(s) \quad (6)$$

3 To get the relative attention values, *softmax* is applied
 4 over a_i .

$$5 \quad p_i = \frac{\exp(a_i)}{\sum_{r_j \in \mathcal{R}(s)} \exp(a_j)} \quad (7)$$

6 where j denotes the j th relation of the subject entity.
 7 The new embedding of the subject entity type expected
 8 by the relation $\hat{\mathbf{r}}_s$ is the sum of the product of repre-
 9 sentation of each relation and the relation weighted by
 10 attention values of the considered relation.

$$11 \quad \hat{\mathbf{r}}_s = \sum_{r_i \in \mathcal{R}(s)} p_i r_i \quad (8)$$

12 Then the type compatibility is calculated via a com-
 13 patibility module, the likelihood of s and r satisfying
 14 *domain* axiom can be defined as follows:

$$15 \quad P_{dm} = f(\mathbf{s}_c, \mathbf{r}_s) = \sigma(\mathbf{s}_c \cdot \hat{\mathbf{r}}_s) \quad (9)$$

16 where σ denotes sigmoid function.

19 3.3.2. Range Axiom Module

20 Range axiom module focuses on type compatibil-
 21 ity between the object entity type expected by the re-
 22 lation r and the type of the object entity o . Similarly,
 23 TypeDM uses $C(\mathbf{o}_c, \mathbf{r}_o) = \sigma(\mathbf{o}_c \cdot \mathbf{r}_o)$ to compute the
 24 compatibility score between the type embedding of ob-
 25 ject entity \mathbf{o}_c and the object entity type embedding ex-
 26 pected by the relation \mathbf{r}_o , where the score indicates the
 27 satisfaction of *range* axiom. However, a relation can
 28 have object entities with very different types. For ex-
 29 ample, the object entity of the relation *hasPart* can be
 30 *Leg* in (*Table, hasPart, Leg*), or *NewYorkBay* in (*At-*
 31 *lantics, hasPart, NewYorkBay*). Similar to the issue in
 32 *domain* axiom, object entities expected by a relation
 33 may exhibit diverse roles within the same relation. The
 34 other relations of the object entity make different con-
 35 tributions to the embedding of the object entity type
 36 expected by the relation. **We apply a range attention**
 37 **layer (Rg_Att_Layer) to the relations that connect the**
 38 **object entity to discern the expected object entity type**
 39 **associated with the given relation more accurately. The**
 40 **relation set that connect to the object entity o is de-**
 41 **noted as $\mathcal{R}(o) = \{r_i | (e, r_i, o) \in \mathcal{G}\}$. We generate the**
 42 **object entity type embedding expected by the relation**

$\hat{\mathbf{r}}_o$ based on all the relations in $\mathcal{R}(o)$. The importance of each relation to r denoted by b_i can be calculated as:

$$b_i = f(\mathbf{r}_o, \mathbf{r}_i) = \mathbf{r}_o^T \mathbf{r}_i, r_i \in \mathcal{R}(o) \quad (10)$$

We then apply *softmax* over b_i to get the relative attention values.

$$q_i = \frac{\exp(b_i)}{\sum_{r_k \in \mathcal{R}(o)} \exp(b_k)} \quad (11)$$

where k denotes the k th relation in the connected relations of the object entity. The generated embedding $\hat{\mathbf{r}}_o$ is the sum of the product of each object entity representation and the relation weighted by attention values of the object entities.

$$\hat{\mathbf{r}}_o = \sum_{r_i \in \mathcal{R}(o)} q_i \mathbf{r}_i \quad (12)$$

The compatibility probability whether the triple satisfies *range* axiom is calculated by a compatibility module, and is defined as:

$$P_{rg} = f(\mathbf{o}_c, \mathbf{r}_o) = \sigma(\mathbf{o}_c \cdot \hat{\mathbf{r}}_o) \quad (13)$$

where σ denotes sigmoid function.

3.3.3. Disjoint Axiom Module

Disjoint axiom module focuses on the compatibility of the semantic embeddings of two relations with the same subject and object entities. For example, for the target correct triple (*John, spouse, Mary*), and the other two triples (*John, friend, Mary*) and (*John, child, Mary*), the disjoint axiom module computes probability scores of the two relation pairs including (*spouse, friend*), and (*spouse, child*). Then we can infer (*John, friend, Mary*) is a correct triple, and (*John, child, Mary*) is an incorrect triple. The reason is that the disjoint probability score of *spouse* and *friend* is high as they can exist between two persons at the same time. While the score of *spouse* and *child* is low, since a person's spouse can not be that person's child. In other words, *spouse* and *child* are defined to be semantically *disjoint*. Following the condition of *disjoint* axiom, we have to traverse the whole knowledge graph to find out all the relations with s being the subject entity and o being the object entity. The relation set is $\mathcal{R}(s, o) = \{r_k | (s, r_k, o) \in \mathcal{G}, r_k \neq r\}$. However, calculating the semantic compatibility of the relation

pairs (r, r_k) is time-consuming. We simply copy the idea from TransE, which holds the view that $s + r = o$ to reduce time cost. Specifically, we regard $(\mathbf{o}_m - \mathbf{s}_m)$ as the unified representation of relations in triples with s and o being the subject and object entity. Therefore, the semantic judgment of this axiom can be simplified to calculate the compatibility score of $(\mathbf{o}_m - \mathbf{s}_m)$ and \mathbf{r}_m , which is defined as:

$$f(\mathbf{r}_m, (\mathbf{o}_m - \mathbf{s}_m)) = \sigma(\mathbf{r}_m \cdot (\mathbf{o}_m - \mathbf{s}_m)) \quad (14)$$

where σ denotes sigmoid function.

3.3.4. Irreflexive Axiom Module

Irreflexive axiom module considers two aspects of judgement. One is the property of the relation (*i.e.*, whether r is *irreflexive*), and the other is whether the subject and object entity are equal (*i.e.*, whether s and o are the same entity). In OWL2, a relation is *irreflexive* means that no entity can be related to itself by such a relation. Thus, only the two conditions the relation r is *irreflexive* and $s = o$ are fulfilled simultaneously, the triple violates *irreflexive* axioms. For example, for the irreflexive relation *hasParent*, it is intuitively that (*John, hasParent, John*) is an incorrect triple.

Due to that we can judge whether $s = o$ directly without the need to represent the two entities as vectors, we conduct this as the first step. If $s = o$, we further consider the property of the relation. Otherwise, the probability that the triple conforms to *irreflexive* axiom is 1 as $s \neq o$ already violates one of the two conditions. For the case of $s = o$, we can infer that types of s and o are the same ($\mathbf{s}_c = \mathbf{o}_c$). In regard to the property of the relation, we expect types of the subject entity and the object entity expected by the relation which are \mathbf{r}_s and \mathbf{r}_o should be respectively compatible with s and o . That is $\mathbf{r}_s \approx \mathbf{s}_c$, and $\mathbf{r}_o \approx \mathbf{o}_c$. Then, it can be concluded that \mathbf{r}_s and \mathbf{r}_o are compatible ($\mathbf{r}_s \approx \mathbf{r}_o$). We use a compatibility module to measure the type constraint, which is calculated as $\sigma(\mathbf{r}_o \cdot \mathbf{r}_s)$. Moreover, the semantic information of the relation \mathbf{r}_m can also help to determine the property of the relation. We utilize a multi-layer perceptron (MLP) layer to encode semantic, and domain and range of the relation. The probability that a triple satisfies *irreflexive* axiom is calculated through the Logic AND operation. The final probability is defined as:

$$P_{irr} = \begin{cases} 1, & \text{if } s \neq o \\ \sigma(W_1[\mathbf{r}_m; g(\mathbf{r}_s, \mathbf{r}_o)]) * \sigma(\mathbf{r}_o \cdot \mathbf{r}_s), & s = o \end{cases} \quad (15)$$

where $g(x, y)$ is a function, and $g(x, y) = \text{abs}(x - y)$. $W_1 \in \mathbb{R}^{1 \times (d_m + t_m)}$, and d_m and t_m are respectively the dimension of the semantic and type embedding. σ denotes sigmoid function. $;$ denotes the concatenation operation.

3.3.5. Asymmetric Axiom Module

Asymmetric axiom module considers two aspects of judgement as well, which are the property of the relation (i.e., whether r is asymmetric) and existence of the symmetric triple of the given triple (i.e., whether (s, r, o) and (o, r, s) are both correct in the same KG). In OWL2, a relation is asymmetric means that if it connects s with o , it never connects o with s . In other words, for the correct triple (s, r, o) , if r is an asymmetric relation and (o, r, s) appears in the same KG as (s, r, o) simultaneously, (o, r, s) is incorrect for the violation of asymmetric axiom. For example, given the correct triple $(\text{John}, \text{hasChild}, \text{David})$, we can infer that $(\text{David}, \text{hasChild}, \text{John})$ violates the asymmetric axiom as hasChild is asymmetric.

In this axiom, we firstly begin the process of determining the property of the relation by focusing on the semantic embedding \mathbf{r}_m . We take a multi-layer perceptron (MLP) layer to capture the semantics of the relation. Secondly, we consider the compatibility of \mathbf{r}_s and \mathbf{r}_o as a condition of the property of the relation. The reason is that, if r is symmetric, we can infer $\mathbf{r}_s \approx \mathbf{r}_o$ from the observations that $\mathbf{r}_s \approx \mathbf{s}_c, \mathbf{r}_o \approx \mathbf{o}_c$ from the triple (s, r, o) , and $\mathbf{r}_s \approx \mathbf{o}_c, \mathbf{r}_o \approx \mathbf{s}_c$ from the triple (o, r, s) . Thirdly, we use the simplest knowledge graph embedding model TransE to check whether (o, r, s) exists. Since the above conditions together determine whether a triple violates this axiom, we introduce a Logical AND operation as well. Therefore, the asymmetric axiom network is defined as follows:

$$f_{kge} = \sigma(\mathbf{o}_m + \mathbf{r}_m - \mathbf{s}_m) \quad (16)$$

$$P_{asy} = \sigma(W_2(\mathbf{r}_m)) * \sigma(\mathbf{r}_o \cdot \mathbf{r}_s) * f_{kge} \quad (17)$$

where $W_2 \in \mathbb{R}^{1 \times d_m}$, and σ denotes sigmoid function.

4. Experiments

We evaluate our proposed method NeuRAN on three main knowledge graph reasoning tasks, including noise detection, link prediction, and triple classification.

4.1. Experimental Settings

Datasets. In this paper, we use two popular benchmark datasets: FB15K237 [38] and WN18RR [18] to evaluate NeuRAN. They are constructed from FB15K and WN18 respectively by removing inverse relations to solve test leakage. FB15K is a relatively dense subset extracted from Freebase [2], which is a large collaborative knowledge graph consisting billions of real-world facts. WN18 is a subset of WordNet [39] that describes relations between words.

Dataset	#Ent	#Rel	#Train	#Valid	#Test
FB15K237	14541	237	272115	17535	20466
WN18RR	40943	11	86835	3034	3134

Table 2
Statistics of FB15K237 and WN18RR

Datasets	FB15K237-10%	FB15K237-20%	FB15K237-40%
#Neg triple	27211	54423	108846

Datasets	WN18RR-10%	WN18RR-20%	WN18RR-40%
#Neg triple	8683	17367	34734

Table 3
Statistics of negative triples generated from FB15K237 and WN18RR

Error Imputation. Since KGs are constructed in an automated or semi-automated way, noises can not be avoided. However, existing knowledge graph reasoning methods assume that triples in KGs are positive triples. And there are no pre-given noisy triples in FB15K237 and WN18RR. In order to verify our method, we generate new datasets with different noise rates based on the two datasets to simulate the real noisy knowledge graphs. Before generating noises, for each dataset with training, validation and test sets, we generate negative triples for the validation and test sets. The positive and negative triples in the validation set are used to find the optimum thresholds for each relation. To evaluate the performance of NeuRAN on triple classification, the positive and negative triples in the test set are classified as positive or negative triples based on both the triple scores and the thresholds. Here, we directly use the negative triples generated in OpenKE*. Then, we randomly sample pos-

*<https://github.com/thunlp/OpenKE/tree/OpenKE-Tensorflow1.0/benchmarks>

	FB15K237-10%	FB15K237-20%	FB15K237-40%	WN18RR-10%	WN18RR-20%	WN18RR-40%
TransE	0.9805	0.9799	0.9793	0.9377	0.9308	0.9291
CKRL(TransE)	0.9809	0.9803	0.9660	0.9337	0.9255	0.8971
NeuRAN(TransE)	0.9807	0.9807	0.9802	0.9403	0.9337	0.9141
TransH	0.9769	0.9752	0.9755	0.9338	0.9185	0.8778
CKRL(TransH)	0.9663	0.9697	0.9683	0.9279	0.9091	0.8527
NeuRAN(TransH)	0.9781	0.9783	0.9796	0.9340	0.9239	0.8780

Table 4

Noise detection results on noisy datasets with different ratios based on FB15K237 and WN18RR. The numbers are auc values.

itive triples from the training set with different noise rates, and generate the same number of negative triples as the sampled triples. Specifically, we corrupt either the subject entity or the object entity of a triple with equal probability, and ensure that the generated negative triples do not in the KG. The generated negative triples are regarded as noises. All the three tasks are evaluated on these simulated noisy datasets.

For each dataset, we construct three noisy datasets with the ratio of negative triples to be 10%, 20%, and 40% of the positive triples. The generated negative triples(noises) with different ratios listed in Table 3 will be added to the training set as part of the training triples, and and labeled as positive triples. For example, for the datasets FB15K237-10%, FB15K237-20% and FB15K237-40%, the number of triples in training set is 299326(272115+27211), 326538(272115+54423) and 380961(272115+108846), respectively. The number of positive triples in the validation and test sets is 17535 and 20466, which is the same as FB15K237. Besides, the number of negative triples in the validation and test sets is the same as the number of positive triples. All the three noisy datasets share the same entities and relations with the original dataset. The detailed statistics of the two datasets, and the generated noisy datasets are shown in Table 2 and 3.

Baselines. We choose TransE or TransH as the knowledge graph embedding module, and compare our methods NeuRAN(TransE) and NeuRAN(TransH) with them. CKRL(TransE) and CKRL(TransH) are also considered as baselines, which introduce path information to deal with knowledge graph reasoning in noisy KGs. Results of TransE and TransH are produced by running OpenKE [40]. Results of CKRL(TransE) and CKRL(TransH) are reproduced by us. In the following tasks, the results of TransE, TransH, CKRL(TransE) and CKRL(TransH) are also obtained in this way.

Training Details. We use SGD [41] or Adam [42] to optimize the model for different tasks on different datasets. We select the learning rate from {0.01, 0.1, 0.5, 1}, the margin among {2,4,6,8,10}, the batch size from {100, 500}, dimension of the type from {20, 50, 100, 200}, dimension of the semantic from {50, 100, 200, 300}, the combination weight of the axiom scores λ from {0.01, 0.05, 0.1, 0.5, 1}. The number of training epoch is set as 1000.

4.2. Noise Detection

To verify the capability of our method to noise detection on a noisy knowledge graph, we follow the setting of the task KG noise detection proposed in [30]. It aims to detect possible noises in noisy KGs according to the scores of triples, which can be viewed as triple classification task on the training set.

Evaluation Protocol. First of all, we compute the score of the triple (s, r, o) via the energy function $E(s, r, o) = E_{kge} + \lambda \cdot [(1 - P_{dm}) + (1 - P_{rg}) + (1 - P_{dis}) + (1 - P_{irr}) + (1 - P_{asy})]$. Then all triples in training set will be ranked based on the scores. The lower the score of the triple, the more valid the triple is. Triples with higher values of the energy function tend to be noises. We consider evaluation indicator the Area Under the ROC Curve (*auc value*) to examine how well the method classifies the noises as errors. Before calculating the auc metric, we normalize the energy function score in the [0, 1] interval, values close to 0 indicate a correct triple, and values close to 1 indicate an erroneous triple.

Result Analysis. Evaluation results on noisy datasets generated based on FB15K237 and WN18RR can be found in Table 4. We observe that: (1) Regardless of the embedding module is TransE or TransH, our model achieves comparable performance or slightly outperform TransE, CKRL(TransE), TransH, and CKRL(TransH) on WN18RR and FB15K237 datasets with different noise rates (i.e., WN18RR-10%, WN18RR-20% and

Methods	WN18RR-10%			WN18RR-20%			WN18RR-40%		
	ACC	P	R	ACC	P	R	ACC	P	R
TransE	0.8764	0.8979	0.8338	0.8575	0.8889	0.8172	0.8355	0.9046	0.7502
CKRL(TransE)	0.8759	0.9201	0.8232	0.8591	0.8973	0.8111	0.8397	0.8909	0.7741
NeuRAN(TransE)	0.8856	0.9281	0.8360	0.8703	0.9100	0.8197	0.8598	0.9328	0.7754
TransH	0.8497	0.9111	0.7750	0.8283	0.8761	0.7648	0.7921	0.8561	0.7023
CKRL(TransH)	0.8556	0.9233	0.7757	0.8403	0.8829	0.7846	0.8116	0.8629	0.7409
NeuRAN(TransH)	0.8687	0.9300	0.7974	0.8598	0.9040	0.8050	0.8323	0.8802	0.7693

Table 5

Triple classification results on WN18RR, WN18RR-10%, WN18RR-20% and WN18RR-40%. "ACC", "P" and "R" are the abbreviation of "accuracy", "precision" and "recall", respectively.

Methods	FB15K237-10%			FB15K237-20%			FB15K237-40%		
	ACC	P	R	ACC	P	R	ACC	P	R
TransE	0.7802	0.7765	0.7870	0.7606	0.7496	0.7826	0.7439	0.7340	0.7650
CKRL(TransE)	0.7758	0.7743	0.7786	0.7605	0.7353	0.8140	0.7422	0.7269	0.7759
NeuRAN(TransE)	0.7810	0.7846	0.7749	0.7656	0.7711	0.7554	0.7484	0.7497	0.7459
TransH	0.7969	0.8055	0.7826	0.7800	0.7877	0.7666	0.7646	0.7624	0.7687
CKRL(TransH)	0.7978	0.8023	0.7904	0.7831	0.7816	0.7857	0.7623	0.7754	0.7387
NeuRAN(TransH)	0.7882	0.8080	0.7561	0.7784	0.7891	0.7600	0.7617	0.7796	0.7299

Table 6

Triple classification results for FB15K237-10%, FB15K237-20% and FB15K237-40%. "ACC", "P" and "R" are the abbreviation of "accuracy", "precision" and "recall", respectively.

WN18RR-40%, FB15K237-10%, FB15K237-20%, and FB15K237-40%). (2) When the complex relations are well encoded, for example in TransH, our model with axiom information show better performance than path information on noise detection on both WN18RR- and FB15K237-based datasets. (3) With the increase of noises, the ability of baselines and our models to detect noises decreases on WN18RR-based datasets. But it may increase on FB15K237-based datasets, which indicates that the larger number of relations and triples in noisy datasets, the more valid information may be introduced, even these triples may be noises.

Thus we conclude that implicit axiom information is useful for noise detection, and it is better reflected on datasets with a large number of relations and triples.

4.3. Triple Classification

Triple classification aims to judge whether a triple in the test set is correct or not, according to triple scores calculated by the energy function $E(s, r, o) = E_{kge} + \lambda \cdot [(1 - P_{DM}) + (1 - P_{RG}) + (1 - P_{DIS}) + (1 - P_{IRRE}) + (1 - P_{ASYM})]$, which can be viewed as a binary classification task on the test set.

Evaluation Protocol. As the test sets of the datasets used for triple classification only have correct triples, we generate negative triples by corrupting the subject or object entity of correct triples randomly. For the validation and test sets, the number of negative triples is the same as the number of positive triples. Thus there are labeled positive and negative triples in the two sets. For example, for WN18RR-based datasets, the number of triples is 6068 in the validation set, and is 6268 in the test set. For triple classification, we learn a relation-specific threshold δ_r for every relation. δ_r is optimized by maximizing classification accuracies on the validation set. Given a triple (s, r, o) , if the score obtained by the energy function is below δ_r , it is classified as positive, otherwise negative. We use accuracy(ACC), precision(P) and recall(R) as the evaluation metrics.

Result Analysis. Table 5 and 6 show the detailed evaluation results of triple classification. From the two tables, we can observe that: (1) In terms of the three metrics, our method outperforms baselines on the WN18RR-based datasets. It achieves the best results in accuracy metric. This confirms that learning knowledge representations with axiom information can help triple classification. (2) On FB15K237-based

	FB15K237-10%			FB15K237-20%			FB15K237-40%		
	MRR	Hit@		MRR	Hit@		MRR	Hit@	
		3	1		3	1		3	1
TransE	0.258	0.299	0.159	0.240	0.279	0.144	0.230	0.270	0.137
CKRL(TransE)	0.252	0.294	0.150	0.236	0.278	0.136	0.225	0.268	0.129
NeuRAN(TransE)	0.284	0.313	0.199	0.269	0.292	0.189	0.251	0.273	0.176
TransH	0.241	0.296	0.125	0.213	0.270	0.094	0.193	0.248	0.078
CKRL(TransH)	0.194	0.254	0.070	0.172	0.229	0.050	0.156	0.209	0.040
NeuRAN(TransH)	0.288	0.317	0.203	0.270	0.293	0.189	0.249	0.272	0.173

Table 7

Link prediction results on FB15K237-10%, FB15K237-20% and FB15K237-40%.

	WN18RR-10%			WN18RR-20%			WN18RR-40%		
	MRR	Hit@		MRR	Hit@		MRR	Hit@	
		3	1		3	1		3	1
TransE	0.211	0.351	0.032	0.206	0.349	0.031	0.193	0.334	0.027
CKRL(TransE)	0.215	0.350	0.044	0.205	0.340	0.034	0.186	0.317	0.026
NeuRAN(TransE)	0.342	0.393	0.256	0.334	0.392	0.247	0.320	0.377	0.236
TransH	0.185	0.290	0.039	0.173	0.276	0.032	0.149	0.244	0.024
CKRL(TransH)	0.184	0.288	0.040	0.174	0.277	0.032	0.145	0.239	0.021
NeuRAN(TransH)	0.330	0.380	0.251	0.328	0.378	0.250	0.314	0.371	0.232

Table 8

Link prediction results on WN18RR-10%, WN18RR-20% and WN18RR-40%.

dataset, the results are comparable with baselines. The improvements on WN18RR-10%, WN18RR-20% and WN18RR-40% is more obvious than on FB15K237-10%, FB15K237-20% and FB15K237-40%. It demonstrates that implicit axiom information is more effective on a dataset with smaller relations and triples. (3) Compared with TransE, TransH, CKRL(TransE) and CKRL(TransH), the higher the noise rate, the smaller the decrease in the accuracy metric of our method on WN18RR-10%, WN18RR-20% and WN18RR-40%. It indicates that on noisy datasets, triple classification results of NeuRAN can be more robust than baselines on small datasets.

From the triple classification results, we can conclude that the combination of implicit axiom and structural information reflected by existing triples in knowledge graphs works better than using only structural information on datasets with a small number of relations and triples. But path information is more useful when the number of relations and triples is large.

4.4. Link Prediction

To show that axiom information could improve embedding learning of entities and relations, and further help complete knowledge graphs, we conduct link prediction task to evaluate the performance of knowledge graph completion. This task aims to predict the missing entity when given one entity and one relation of a triple, including subject entity prediction ($?, r, o$) and object entity prediction ($s, r, ?$).

Evaluation Protocol. For each test triple, suppose the subject entity prediction ($?, r, o$) with the right subject entity s . We first take all entities $e \in \mathcal{E}$ in the dataset as candidate predictions, and then replace the missing part with each entity e and calculate scores for triples in $\mathcal{T} = \{(e, r, o) | e \in \mathcal{G}\}$. Subsequently, we rank these scores by ascending order, the rank of the correct entity is stored. The object entity prediction is done in the same way. The evaluation metrics are MRR and Hits@N, where MRR is the mean reciprocal rank of the ranks of all test triples, and Hits@N (N=1,3) is the proportion of ranks within N of all test triples. A higher MRR and a higher Hits@1, 3 should be achieved by

	WN18RR-10%			FB15K237-10%		
	MRR	Hit@		MRR	Hit@	
		3	1		3	1
KGE	0.2103	0.3468	0.0333	0.2267	0.2851	0.1067
KGE+DM	0.2108	0.3476	0.0337	0.2267	0.2848	0.1067
KGE+RG	0.2134	0.3500	0.0370	0.2268	0.2853	0.1069
KGE+DIS	0.2203	0.3529	0.0490	0.2723	0.3069	0.1795
KGE+IRRE	0.3407	0.3925	0.2554	0.2746	0.3030	0.1864
KGE+ASYM	0.2108	0.3472	0.0341	0.2267	0.2851	0.1067
KGE+ALL	0.3417	0.3926	0.2562	0.2838	0.3128	0.1987

Table 9

Ablation study of link prediction results on WN18RR-10% and FB15K237-10%. KGE is TransE.

a good embedding model. This is called 'raw' setting. If we filter out the corrupted triples that exist in the training, validation or test set before ranking, the evaluation setting is called 'filter'. In this paper, we report evaluation results of the filter setting.

Result Analysis. Link prediction results are shown in Table 7 and 8. We analyze the results as follows: (1) The link prediction results of our method are improved compared with baselines on WN18RR-10%, WN18RR-20% and WN18RR-40% datasets, as well as on FB15K237-10%, FB15K237-20% and FB15K237-40%. It confirms that the quality of learned knowledge graph embeddings are better, and could also help to complete KGs. Besides, it indicates axiom information can be more useful than path information on noisy datasets. (2) On WN18RR-10%, WN18RR-20% and WN18RR-40% datasets, our method achieves the best performance on all metrics. The improvements are significantly on all metrics, especially on Hit@1. It demonstrates that axiom information is of great help in improving the predictive ability of a missing triple, when the dataset has fewer relations and triples. (3) On FB15K237-10%, FB15K237-20% and FB15K237-40%, although the improvements of the results are less obvious compared with WN18RR-based datasets, the results are better than baselines. It reaffirms that our method can improve link prediction, and the more relations and triples, the more information as well as noises brought by axiom information. Therefore, the advantages of implicit axiom information would not as significant as in small-scale dataset.

Thus we can conclude that implicit axiom information encoded by neural axiom networks help improve the quality of learned embeddings of entities and relations, and improve link prediction. And such infor-

mation is more effective on datasets with a relatively small number of relations and triples.

4.5. Ablation study

We conduct ablation studies on link prediction to assess the effectiveness of NeuRAN. As our model is composed of a knowledge graph embedding module and five neural axiom modules, we add each axiom module to the knowledge graph embedding module to investigate the contributions of the axiom module. Specifically, we use the score function and loss function defined in equation 1 and 2 to train our model. TransE is taken as the knowledge graph embedding module. For evaluation, we set the score function as $E(s, r, o) = E_{kge} + \lambda \cdot E_a$ to illustrate the impact of each axiom module. $E(s, r, o)$ is the score of the triple, and E_{kge} is the score from the knowledge graph embedding module. E_a means the score of the selected axiom, and can be $(1 - P_{dm})$, $(1 - P_{rg})$, $(1 - P_{dis})$, $(1 - P_{irr})$ or $(1 - P_{asy})$.

From Table 9, we can observe that adding any of these five axioms can improve link prediction results on WN18RR-10%. The disjoint and irreflexive modules work better than other modules. Particularly, the irreflexive axiom module has shown substantial improvements on MRR and Hit@1 metrics. As the number of relations is small and most relations are asymmetric on WN18RR%, using attention mechanism to aggregate relation representations or adding the asymmetric module have a small gain. For the results on FB15K237-10% dataset with more relations, noisy triples can affect the aggregated representations. Besides, the small number of asymmetric relations makes the asymmetric module ineffective. Although the domain, range and asymmetric modules are not as ef-

ficient as the other modules, we consider them for a comprehensive exploration.

5. Conclusion

In this paper, we propose a novel neural axiom network model which aims to do reasoning on noisy knowledge graphs. We consider to encode not only structural information, but also axiom information of triples. In specific, we propose a knowledge graph embedding module for preserving the structure, and five different axiom modules for calculating probability scores that the corresponding axioms are satisfied. We evaluate our method on KG noise detection, triple classification and link prediction. Experiments show that axiom information can benefit these tasks.

In the future, we will attempt to explore more implicit or explicit information existed in triples to enhance the performance of knowledge graph reasoning. Furthermore, we will improve our method to apply it for inconsistency reasoning, as axiom information may be able to provide explanations for inconsistent triples.

References

- [1] J. Lehmann, R. Isele, M. Jakob, A. Jentzsch, D. Kontokostas, P.N. Mendes, S. Hellmann, M. Morsey, P. van Kleef, S. Auer and C. Bizer, DBpedia - A large-scale, multilingual knowledge base extracted from Wikipedia, *Semantic Web* **6**(2) (2015), 167–195.
- [2] K.D. Bollacker, C. Evans, P. Paritosh, T. Sturge and J. Taylor, Freebase: a collaboratively created graph database for structuring human knowledge, in: *SIGMOD Conference*, ACM, 2008, pp. 1247–1250.
- [3] T.P. Tanon, D. Vrandečić, S. Schaffert, T. Steiner and L. Pintscher, From Freebase to Wikidata: The Great Migration, in: *WWW*, ACM, 2016, pp. 1419–1428.
- [4] J. Hoffart, F.M. Suchanek, K. Berberich and G. Weikum, YAGO2: A spatially and temporally enhanced knowledge base from Wikipedia, *Artif. Intell.* **194** (2013), 28–61.
- [5] A. Bordes, J. Weston and N. Usunier, Open Question Answering with Weakly Supervised Embedding Models, in: *ECML/PKDD (1)*, Lecture Notes in Computer Science, Vol. 8724, Springer, 2014, pp. 165–180.
- [6] X. Wang, X. He, Y. Cao, M. Liu and T. Chua, KGAT: Knowledge Graph Attention Network for Recommendation, in: *KDD*, ACM, 2019, pp. 950–958.
- [7] R. West, E. Gabrilovich, K. Murphy, S. Sun, R. Gupta and D. Lin, Knowledge base completion via search-based question answering, in: *WWW*, ACM, 2014, pp. 515–526.
- [8] A. Melo and H. Paulheim, Automatic detection of relation assertion errors and induction of relation constraints, *Semantic Web* **11**(5) (2020), 801–830.
- [9] L.A. Galárraga, C. Teflioudi, K. Hose and F.M. Suchanek, AMIE: association rule mining under incomplete evidence in ontological knowledge bases, in: *WWW*, International World Wide Web Conferences Steering Committee / ACM, 2013, pp. 413–422.
- [10] L. Galárraga, C. Teflioudi, K. Hose and F.M. Suchanek, Fast rule mining in ontological knowledge bases with AMIE+, *VLDB J.* **24**(6) (2015), 707–730.
- [11] W.W. Cohen, TensorLog: A Differentiable Deductive Database, *CoRR* **abs/1605.06523** (2016).
- [12] F. Yang, Z. Yang and W.W. Cohen, Differentiable Learning of Logical Rules for Knowledge Base Reasoning, in: *NIPS*, 2017, pp. 2319–2328.
- [13] A. Bordes, N. Usunier, A. García-Durán, J. Weston and O. Yakhnenko, Translating Embeddings for Modeling Multi-relational Data, in: *NIPS*, 2013, pp. 2787–2795.
- [14] Z. Wang, J. Zhang, J. Feng and Z. Chen, Knowledge Graph Embedding by Translating on Hyperplanes, in: *AAAI*, AAAI Press, 2014, pp. 1112–1119.
- [15] Y. Lin, Z. Liu, M. Sun, Y. Liu and X. Zhu, Learning Entity and Relation Embeddings for Knowledge Graph Completion, in: *AAAI*, AAAI Press, 2015, pp. 2181–2187.
- [16] B. Yang, W. Yih, X. He, J. Gao and L. Deng, Embedding Entities and Relations for Learning and Inference in Knowledge Bases, in: *ICLR (Poster)*, 2015.
- [17] T. Trouillon, J. Welbl, S. Riedel, É. Gaussier and G. Bouchard, Complex Embeddings for Simple Link Prediction, in: *ICML*, JMLR Workshop and Conference Proceedings, Vol. 48, JMLR.org, 2016, pp. 2071–2080.
- [18] T. Dettmers, P. Minervini, P. Stenetorp and S. Riedel, Convolutional 2D Knowledge Graph Embeddings, in: *AAAI*, AAAI Press, 2018, pp. 1811–1818.
- [19] D.Q. Nguyen, T.D. Nguyen, D.Q. Nguyen and D.Q. Phung, A Novel Embedding Model for Knowledge Base Completion Based on Convolutional Neural Network, in: *NAACL-HLT (2)*, Association for Computational Linguistics, 2018, pp. 327–333.
- [20] D.Q. Nguyen, T. Vu, T.D. Nguyen, D.Q. Nguyen and D.Q. Phung, A Capsule Network-based Embedding Model for Knowledge Graph Completion and Search Personalization, in: *NAACL-HLT (1)*, Association for Computational Linguistics, 2019, pp. 2180–2189.
- [21] R. Iry and P.S. Kumar, Mining Inverse and Symmetric Axioms in Linked Data, in: *JIST*, Lecture Notes in Computer Science, Vol. 10675, Springer, 2017, pp. 215–231.
- [22] D. Fleischhacker and J. Völker, Inductive Learning of Disjointness Axioms, in: *OTM Conferences (2)*, Lecture Notes in Computer Science, Vol. 7045, Springer, 2011, pp. 680–697.
- [23] Y. Ma, H. Gao, T. Wu and G. Qi, Learning Disjointness Axioms With Association Rule Mining and Its Application to Inconsistency Detection of Linked Data, in: *CSWS*, Communications in Computer and Information Science, Vol. 480, Springer, 2014, pp. 29–41.
- [24] G. Töpper, M. Knuth and H. Sack, DBpedia ontology enrichment for inconsistency detection, in: *I-SEMANTICS*, ACM, 2012, pp. 33–40.
- [25] G. Ji, S. He, L. Xu, K. Liu and J. Zhao, Knowledge Graph Embedding via Dynamic Mapping Matrix, in: *ACL (1)*, The Association for Computational Linguistics, 2015, pp. 687–696.
- [26] T. Ebisu and R. Ichise, TorusE: Knowledge Graph Embedding on a Lie Group, in: *AAAI*, AAAI Press, 2018, pp. 1819–1826.

- [27] Z. Sun, Z. Deng, J. Nie and J. Tang, RotatE: Knowledge Graph Embedding by Relational Rotation in Complex Space, in: *ICLR (Poster)*, OpenReview.net, 2019.
- [28] M. Nickel, L. Rosasco and T.A. Poggio, Holographic Embeddings of Knowledge Graphs, in: *AAAI*, AAAI Press, 2016, pp. 1955–1961.
- [29] S. Jia, Y. Xiang, X. Chen, K. Wang and S. E, Triple Trustworthiness Measurement for Knowledge Graph, in: *WWW*, ACM, 2019, pp. 2865–2871.
- [30] R. Xie, Z. Liu, F. Lin and L. Lin, Does William Shakespeare REALLY Write Hamlet? Knowledge Representation Learning With Confidence, in: *AAAI*, AAAI Press, 2018, pp. 4954–4961.
- [31] X. Lv, L. Hou, J. Li and Z. Liu, Differentiating Concepts and Instances for Knowledge Graph Embedding, in: *EMNLP*, Association for Computational Linguistics, 2018, pp. 1971–1979.
- [32] L. Zhao, X. Zhang, K. Wang, Z. Feng and Z. Wang, Learning Ontology Axioms over Knowledge Graphs via Representation Learning, in: *ISWC Satellites*, CEUR Workshop Proceedings, Vol. 2456, CEUR-WS.org, 2019, pp. 57–60.
- [33] W. Zhang, B. Paudel, L. Wang, J. Chen, H. Zhu, W. Zhang, A. Bernstein and H. Chen, Iteratively Learning Embeddings and Rules for Knowledge Graph Reasoning, in: *WWW*, ACM, 2019, pp. 2366–2377.
- [34] H. Paulheim and C. Bizer, Improving the Quality of Linked Data Using Statistical Distributions, *Int. J. Semantic Web Inf. Syst.* **10**(2) (2014), 63–86.
- [35] J. Chen, F. Lécué, J.Z. Pan, S. Deng and H. Chen, Knowledge graph embeddings for dealing with concept drift in machine learning, *J. Web Semant.* **67** (2021), 100625.
- [36] Q. Wang, Z. Mao, B. Wang and L. Guo, Knowledge Graph Embedding: A Survey of Approaches and Applications, *IEEE Trans. Knowl. Data Eng.* **29**(12) (2017), 2724–2743.
- [37] P. Jain, P. Kumar, Mausam and S. Chakrabarti, Type-Sensitive Knowledge Base Inference Without Explicit Type Supervision, in: *ACL (2)*, Association for Computational Linguistics, 2018, pp. 75–80.
- [38] K. Toutanova and D. Chen, Observed versus latent features for knowledge base and text inference, in: *Proceedings of the 3rd workshop on continuous vector space models and their compositionality*, 2015, pp. 57–66.
- [39] G.A. Miller, WordNet: A Lexical Database for English, *Commun. ACM* **38**(11) (1995), 39–41.
- [40] X. Han, S. Cao, X. Lv, Y. Lin, Z. Liu, M. Sun and J. Li, OpenKE: An Open Toolkit for Knowledge Embedding, in: *EMNLP (Demonstration)*, Association for Computational Linguistics, 2018, pp. 139–144.
- [41] J.C. Duchi, E. Hazan and Y. Singer, Adaptive Subgradient Methods for Online Learning and Stochastic Optimization, *J. Mach. Learn. Res.* **12** (2011), 2121–2159.
- [42] D.P. Kingma and J. Ba, Adam: A Method for Stochastic Optimization, in: *ICLR (Poster)*, 2015.